
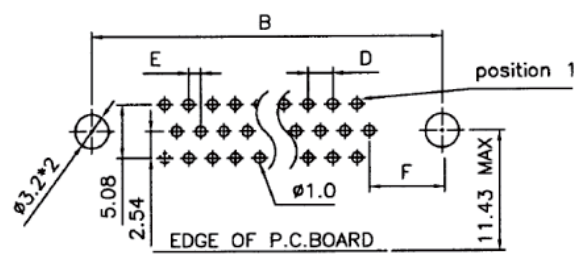
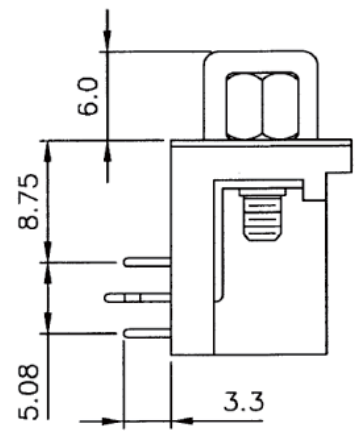


SPECIFICATION
MATERIAL
 Insulator: Thermal Plastic UL94V-0
 Contacts: Copper Alloy
 Shell: Steel
 Rivet, Boardlock: Copper alloy
CONTACT PLATING
 Underplate: 50u"~100u" Nickel
 Contact Area: 1u"~30u" Selective Gold
 Solder Tails Area: 100u"~200u" Tin(Lead Free)
ELECTRICAL
 Operation Voltage: 250 VAC max.
 Current rating: 3 Amps max.
 Contact resistance: 15 mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Temperature Range: -55°C to +105°C
CONTACT PLATING: Gold Flash
INSULATOR COLOR: black

POSITION	A	B	C	D	E	F
15	16.30	25.00	30.8	2.29	1.145	7.04
26	24.60	33.30	39.2	2.29	1.145	6.88
44	38.30	47.10	53.1	2.29	1.145	6.88
62	54.80	63.50	69.4	2.41	1.205	7.00

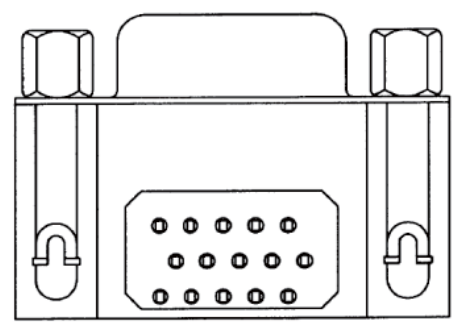

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
 TOLERANCES: ±0.05mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY		X. ± 0.50 .X ± 0.30 .XX ± 0.20
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	.XXX ± ANG ±
DATE		
SIZE A4	P PROJECTION	



ORDER INFORMATION

HDRF-SG-xx-LF
 SERIES | LEADFREE
 | 15-62 WAY
 | GOLD
 | FEMALE

DESCRIPTION: High Density D USB Female Dip E.M.I. Filter

www.morethanall.com