
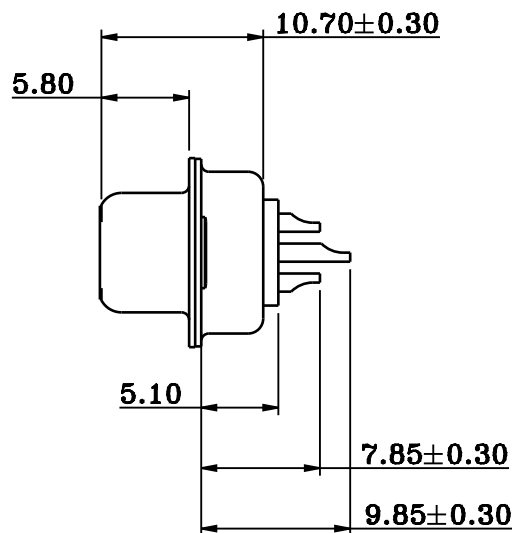
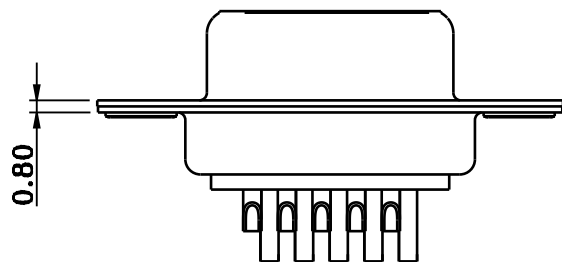


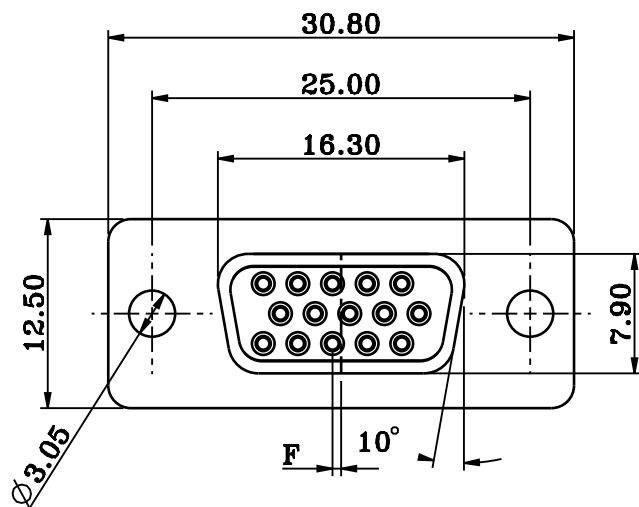

MATERIALS AND FINISH

SHELL: STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
BACK SHELL NICKEL FINISHED
DIMPLES ON PLUG ONLY

INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED,
UL 94V-0 RATED, BLACK COLOR

CONTACT: PRECISION MACHINED COPPER ALLOY
FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 3.0 A

CONTACT RESISTANCE : 10 mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.

INSULATION RESISTANCE : 5GΩ MIN.

TEMPERATURE RATING : -55°C ~ +125°C

POS.	A	B	C	D	E	F
15	30.80	25.00	16.30	12.50	7.90	0.57
26	39.20	33.30	24.60	12.50	7.90	0.57
44	53.05	47.05	38.40	12.50	7.90	0.57
62	69.40	63.50	54.80	12.50	7.90	0.60
78	67.00	61.00	52.20	15.30	10.90	0.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

HD SL-SG-xx-LF

SERIES T LEADFREE
15.26.44.62.78 WAY
GOLD
FEMALE

DESCRIPTION: