

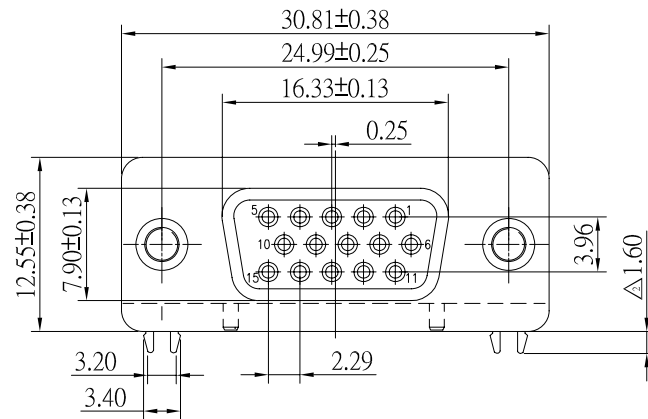
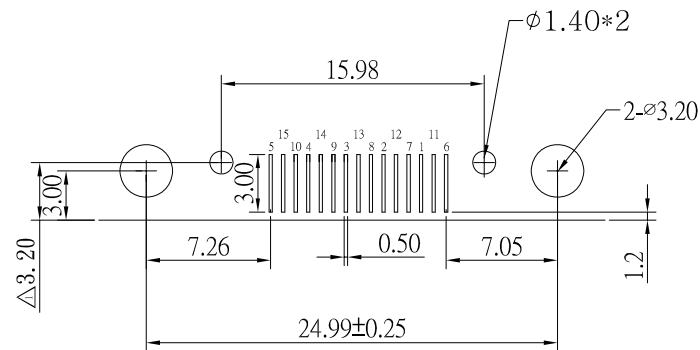




MATERIAL
HOUSING : HIGH TEMPERATURE HOUSING
NY-9T/LCP (UL94V-0) WITHSTANDS IR AND
VPR SOLDERING METHODS.
CONTACTS : PHOSPHOR BRONZE.
PLATING : SELECTIVE GOLD PLATED.

SPECIFICATION
CURRENT RATING : 1AMP.
INSULATOR RESISTANCE $5000M\Omega$ MIN. AT DC 500V.
CONTACT RESISTANCE : $20M\Omega$ MAX. AT DC 100mA.
OPERATING TEMPERATURE : $-65^{\circ}C \sim +125^{\circ}C$.
MAX PROCESSING TEMPERATURE: $260 \pm 10^{\circ}C$ FOR 3~5 SECONDS.

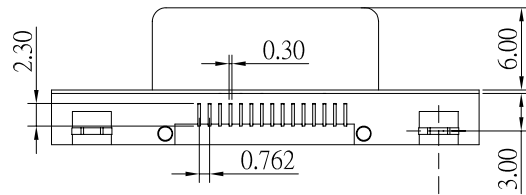

RECOMMENDED P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$
.X ± 0.30
.XX ± 0.20
.XXX ± 0.05
ANG $\pm 3^{\circ}$

PPOJECTION

照片框

ORDER INFORMATION

HDW-SNZ1-15-LF
SERIES T T T LEADFREE
CLIP
NUT
FEMALE

DESCRIPTION: D-SUB CONNECTOR SLIM SMT TYPE (1.20mm) 15 FEMALE HIGH DENSITY