
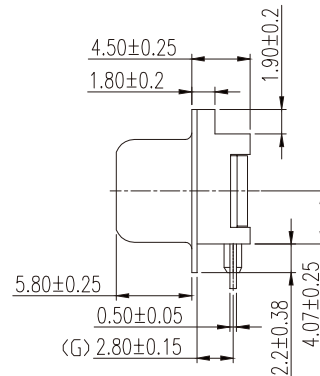


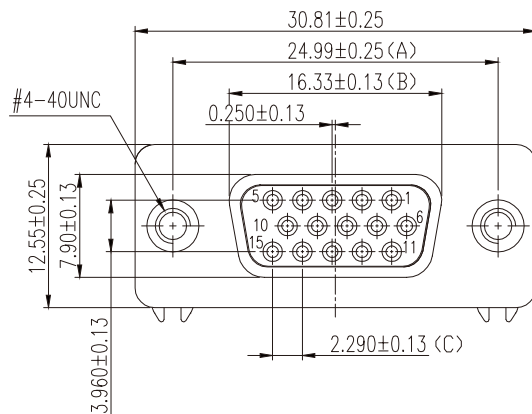

SPECIFICATIONS

1. D-SUB

- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 1 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 1000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 500V AC(RMS)
- 1.6 Total Mating Force: 6.0 Kgf Max.
- 1.7 Total Unmating Force: 1.2 Kgf Min.
- 1.8 Operating Temperature: -55°C to +85°C

NOTES




1. MATERIAL:

Housing:PA9T, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Rivet:Copper Alloy.
Screw:Copper Alloy.


2. FINISH:

Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Rivet:Nickel Plated.
Screw:Nickel Plated.

3. This Product is LEAD-FREE & RoHS Compliance Product.

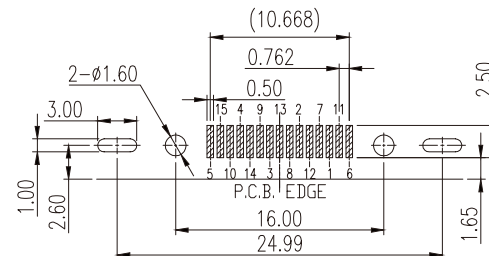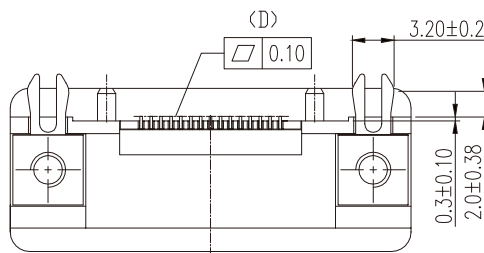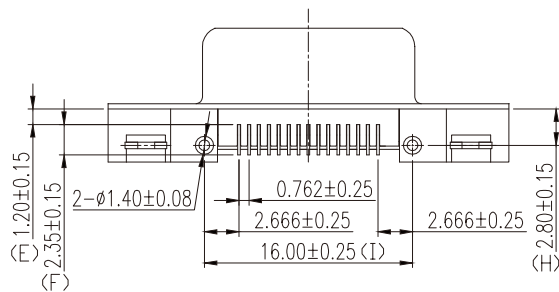

RECOMMENDED P.C.B LAYOUT
INSPECTION DIMENSION:(A)~(I)

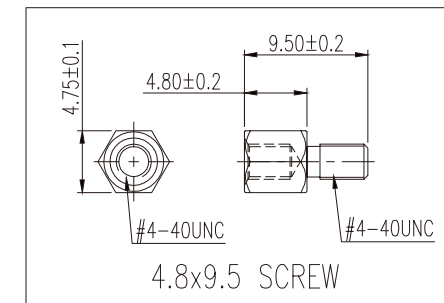

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

HDW-SNZ1H-15-LF
SERIES | LEADFREE
15WAY
HEX SCREW
CLIP
NUT
FEMALE

DESCRIPTION: D-SUB 15 FEMALE HIGH DENSITY CONNECTOR SLIM S.M.T TYPE