
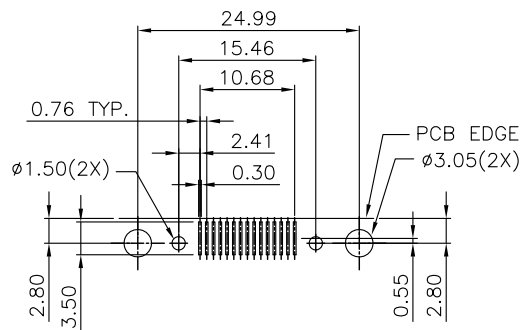


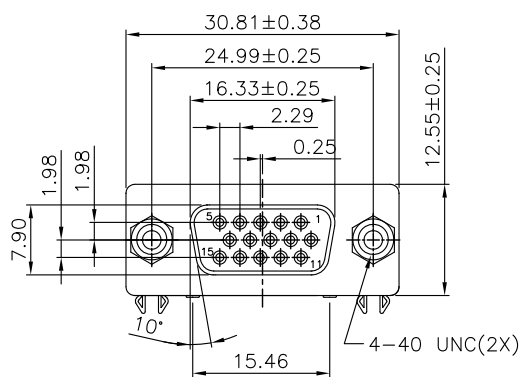

PIN NUMBER:
6 11 1 7 12 2 8 13 3 9 14 4 10 15 5
RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05(TOP VIEW)

NOTES:

1.MATERIAL:

HOUSING:HIGH TEMP THERMOPLASTIC,UL94V-0

TERMINAL:PHOSPHOR BRONZE

METAL SHELL:SPCC

BOARD LOCK & NUT & SCREW:BRASS

2.PLATING:

TERMINAL:

CONTACT AREA:SELECTIVE GOLD(Au) PLATING

SOLDER TAIL:TIN(Sn),THICKNESS=100 MICROINCH MIN.(2.54 MICROMETER MIN.)

UNDER PLATE:NICKEL(Ni),THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)

METAL SHELL:

NICKEL(Ni),THICKNESS=80 MICROINCH MIN.(2.032 MICROMETER MIN.)

UNDER PLATE:COPPER(Cu),THICKNESS=40 MICROINCH MIN.(1.016 MICROMETER MIN.)




BOARD LOCK:

TIN(Sn),THICKNESS=80 MICROINCH MIN.(2.032 MICROMETER MIN.)


UNDER PLATE:NICKEL(Ni),THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)

NUT & SCREW:NICKEL(Ni),THICKNESS=50 MICROINCH MIN.(1.27 MICROMETER MIN.)

3.RECOMMENDED PCB THICKNESS:1.60±0.05mm

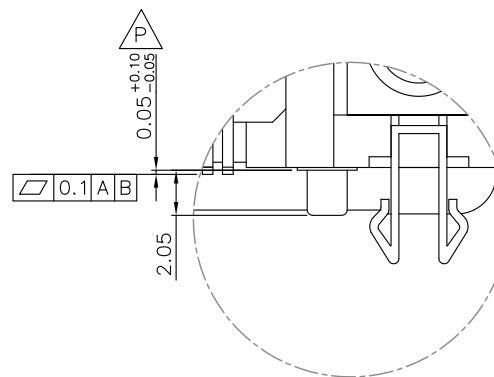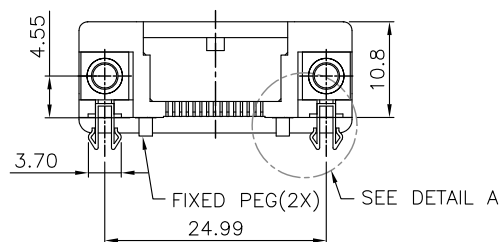

DETAIL A
SCALE 3:1

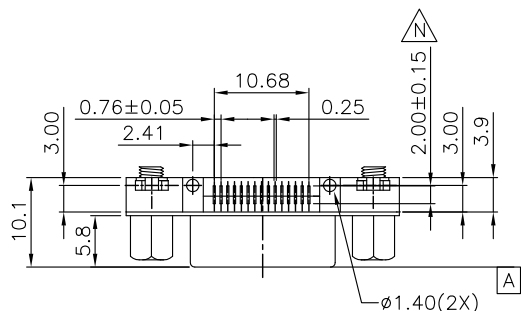

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°

照片框

ORDER INFORMATION

HDW-SNZ2J-15-LF
SERIES | LEADFREE
15 WAY
FEMALE | JACKSCREW
NUT | CLIP TYPE 2

DESCRIPTION: D SUBMINIATURE, RIGHT ANGLE
SURFACE-MOUNT LOW PROFILE 15 POSITION, FEMALE