




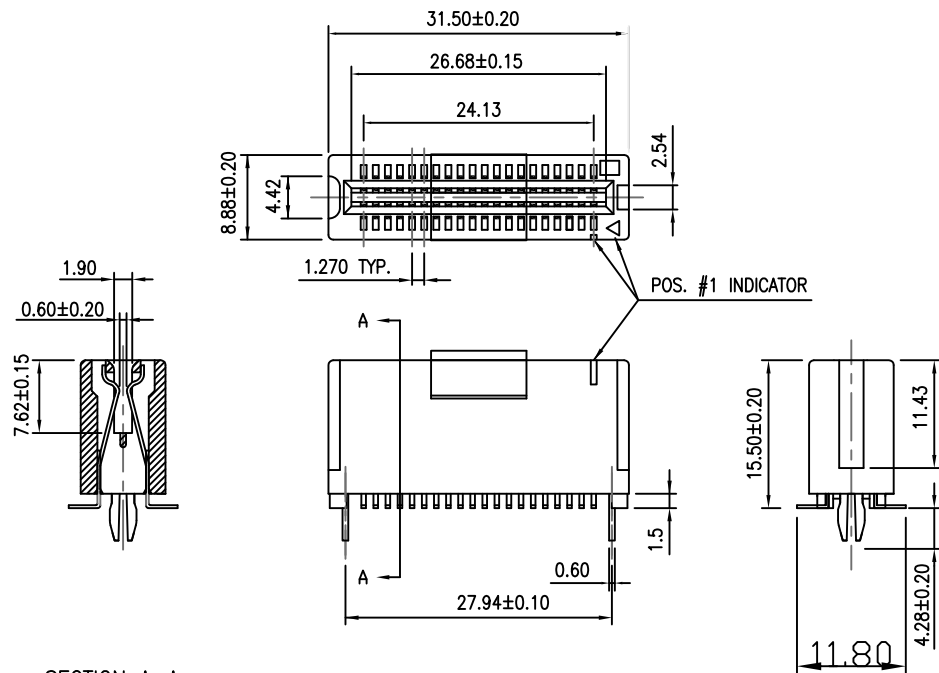

SECTION A-A

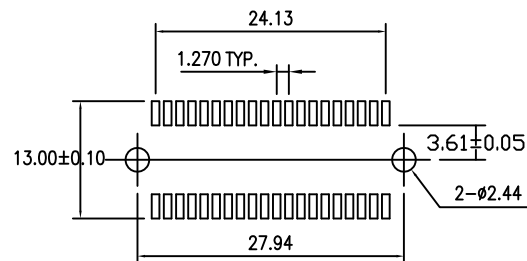

RECOMMENDED PCB LAYOUT (TOP VIEW)

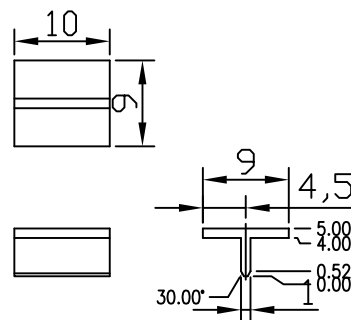

MATERIALS

- * Housing: P.P.S.(UL-94V-0)
- * Contact: Copper Alloy
- * Contact plating: Gold G/F

SPECIFICATIONS

- * Operating Temperature: -40°C to +105°C
- * Contact current rating : 1 AMP
- * Contact resistance: 30 m ohms . Max.
- * Insulation resistance: 5000 M ohms. Min.
- * Dielectrical withstanding :500 AC for one minute
- * Retension Force : 40g Min.
- * Insertion Force : 130g Max.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HE-VZC-040-LF
SERIES 40 WAY LEADFREE
CAP CLIP
180°SMT

DESCRIPTION: PCI SMT TYPE CONN.