
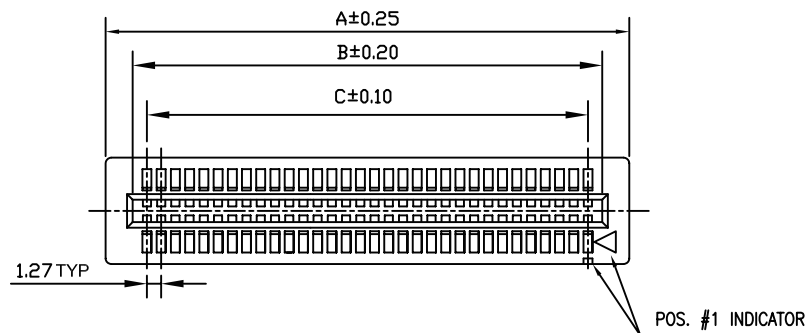


SECTION A-A

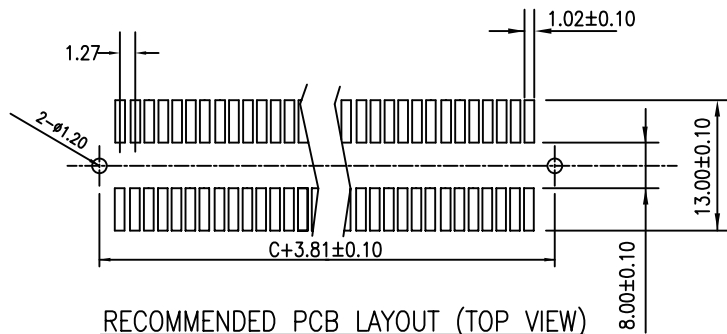

MATERIAL
 INSULATOR: GLASS-REINFORCED THERMOPLASTIC PPS.
 CONTACT: COPPER ALLOY.
 PLATING: MATING AREA - SELECTED GOLD OVER NICKEL.
 SOLDER AREA - TIN OVER NICKEL.

ELECTRICAL
 VOLTAGE RATING: 250 VAC RMS.
 CURRENT RATING: 1 AMP.
 DIELECTRICAL WITHSTANDING VOLTAGE: 500 VAC RMS 60 Hz FOR 1 MINUTE.
 INSULATION RESISTANCE: 1000 MEGOHMS MIN AT 500 VDC.
 CONTACT RESISTANCE: 30 MILLIOHMS MAX AT 1 AMP DC.

MECHANICAL
 RETENTION FORCE: 460 GRAMS MIN PER CONTACT.
 INSERTION FORCE: 230 GRAMS MAX PER CONTACT PER.
 WITHDRAWAL FORCE: 15 GRAMS MIN PER CONTACT PER.

ENVIRONMENTAL
 TEMPERATURE RANGE: -55°C TO +85°C.

DIM. Pin NO.	A	B	C
30PIN	21.24	16.00	14.00
36PIN	24.24	19.00	17.00
48PIN	30.24	25.00	23.00
56PIN	34.24	29.00	27.00
64PIN	38.24	33.00	31.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HEL-V95X-xxx-LF
 SERIES LEADFREE
 030~064 WAY
 NON POST
 HIGH 9.53mm
 180°SMT

DESCRIPTION: MCA CNR SMD , SMD POST TYPE LOW PROFILE