


Marking/印字内容: E128076 T AWM 2651 28AWG VW-1 105°C 300V A1 xxxxx
 or (E128076 T AWM 2651 28AWG VW-1 105°C 300V xxxxx)
 or (" T " AWM 2651 VW-1 105°C 300V 28AWG E128076 xxxxx)

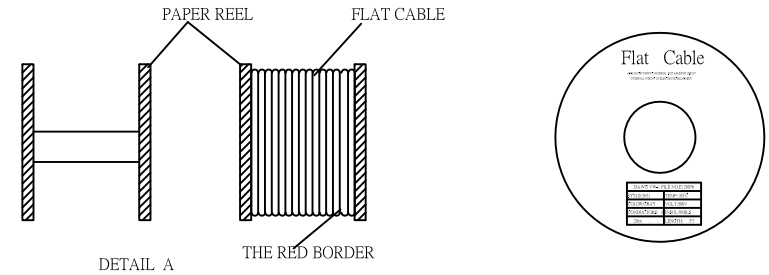

Number of Cores	Size of conductor		Thickness (mm±0.05)	Width(mm)	Allowable Error(mm)
	AWG	Composition(Stranded)±0.005mm			
* 8 P	28	7/0.127	0.9	10.16	±0.30
9 P	28	7/0.127	0.9	11.43	±0.30
10 P	28	7/0.127	0.9	12.70	±0.30
14 P	28	7/0.127	0.9	17.78	±0.30
15 P	28	7/0.127	0.9	19.05	±0.30
16 P	28	7/0.127	0.9	20.32	±0.30
20 P	28	7/0.127	0.9	25.40	±0.30
25 P	28	7/0.127	0.9	31.75	±0.30
26 P	28	7/0.127	0.9	33.02	±0.30
30 P	28	7/0.127	0.9	38.10	±0.30
34 P	28	7/0.127	0.9	43.18	±0.40
40 P	28	7/0.127	0.9	50.80	±0.40
50 P	28	7/0.127	0.9	63.50	±0.40
60 P	28	7/0.127	0.9	76.20	±0.40
64 P	28	7/0.127	0.9	81.28	±0.40

1.

外被材質/Material: PVC
 顏色/Color: Gray

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X, ±
 X, ±
 .XX ±
 .XXX ±
 ANG ±

ORDER INFORMATION

HF-28R1HF-xx-LF
 SERIES | LEADFREE
 08-64WAY
 1 ROLL/100FEET
 28 AWG

DESCRIPTION: FLAT CABLE UL2651-28AWG -PH1.27MM

煜倫股份有限公司

www.morethanall.com