


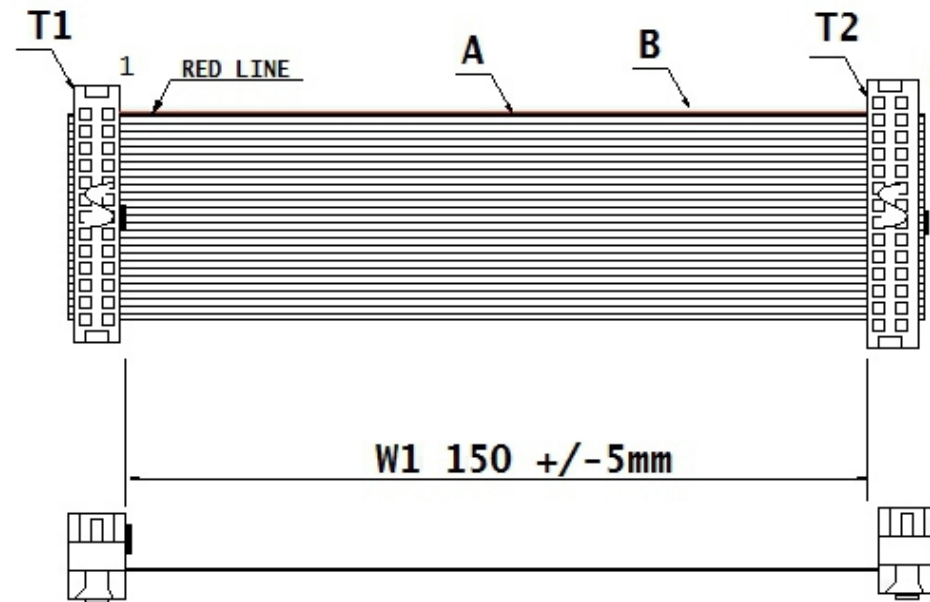

Item	Description	Quantity
A	L/W PVC UL 2678 30AWG 60P GRAY (Pitch0.635mm)	1
T1	IDC 1.27*2.54+SR (60P) HF-C3S-60	1
T2	IDC 1.27*2.54+SR (60P) HF-C3S-60	1
W1	150mm	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HF3X2-6060-F15C-LF

SERIES


LEADFREE

150mm




FEMALE TO FEMALE

60 TO 60 WAY

DESCRIPTION:

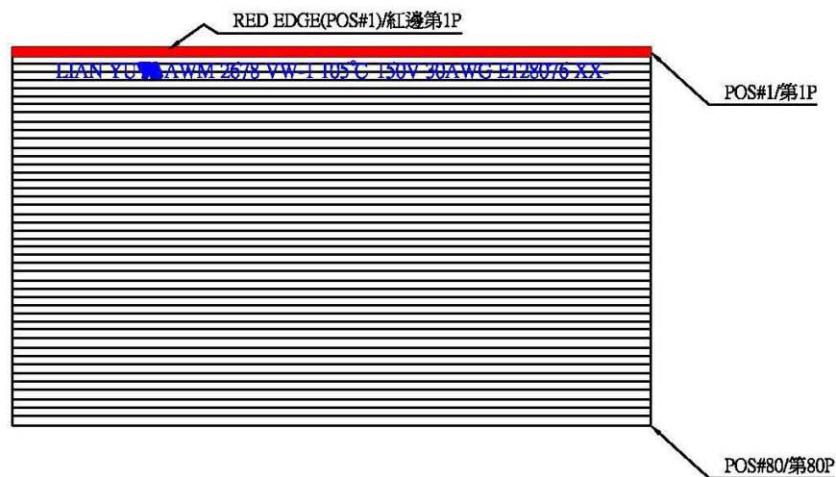

外被材质/Material:PVC
颜色/Color: deep gray

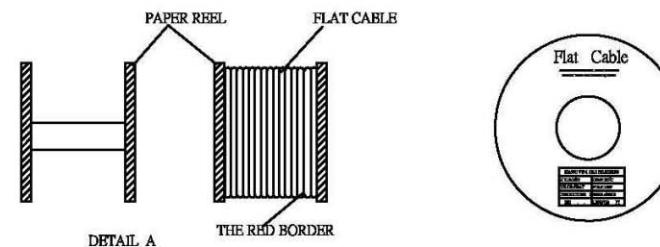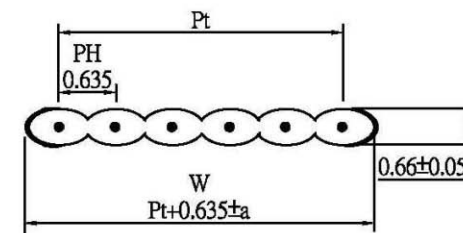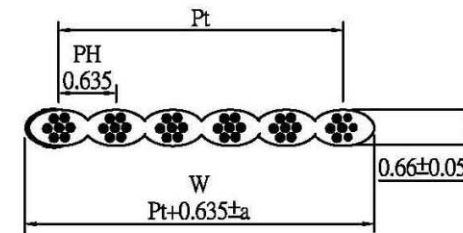

E128076 LIAN YU "T" AWM 2678 30AWG VW-1 105°C 150V A1 xxxxx
Marking/印字内容: E128076 LIAN YU "T" AWM 2678 30AWG VW-1 105°C 150V xxxxx
OR(LIAN YU "T" AWM 2678 VW-1 105°C 150V 30AWG E128076 XXXXX)

Number of Cores	Size of conductor		Thickness (mm±0.05)	Width(mm)	Allowable Error(mm)
	AWG	Composition(mm)±0.005mm			
停產80 P	30	1/0.254(BC)	0.66	50.8	±0.25
停產 50 P	30	7/0.10(TC)	0.66	31.75	±0.25
68 P	30	7/0.10(TC)	0.66	43.18	±0.25

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

HF3X2-6060-F15C-LF

SERIES

LEADFREE

150mm

FEMALE TO FEMALE

60 TO 60 WAY

DESCRIPTION: