


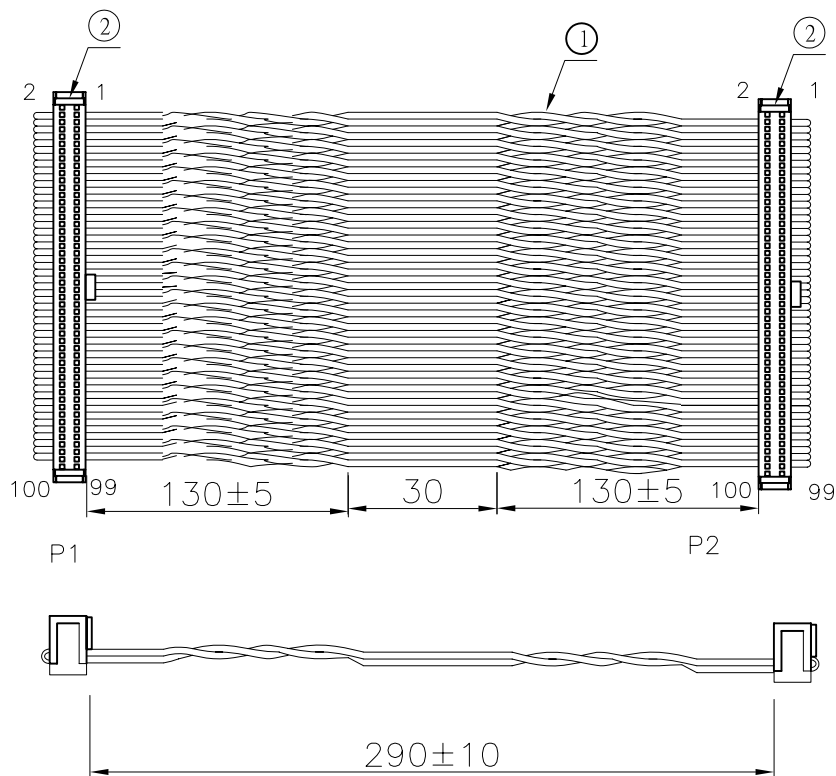

接點示意圖

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
.	.
.	.
.	.
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

⑤	紙箱	PCS	40*34*30CMM
④	防水袋	PCS	88*88CM
③	PE袋	1/25PCS	21*25CM
②	插頭	2PCS	IDC 100P PH:1.27*2.54MM 黑色有耳三件
①	線材	1PCS	UL20276 30AWG 50PR(1P:RED/WHITE,49P:BLUE/WHITE)藍白芯線 L=340MM
NO.	NAME	Q'TY	DESCRIPTION

ELECTRICAL CHARACTER:

1. 100% OPEN/SHORT.
2. CONTACT RESISTANCE: 20HMS
3. HI-POT: 300V 10MS
4. INSULATION RESISTANCE: 20MOHMS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HF3X2-A0A0-F29C-LF

SERIES

LEADFREE

290mm

FEMALE TO FEMALE

100 TO 100 WAY

DESCRIPTION: