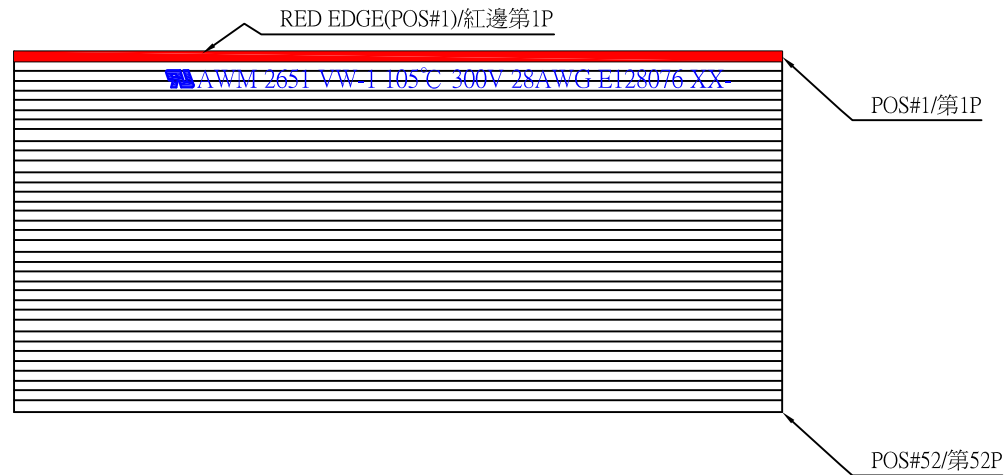


Marking/印字内容: "T" AWM 2651 VW-1 105°C 300V 28AWG E128076 xxxx
 or(E128076 "T" AWM 2651 28AWG VW-1 105°C 300V A1 xxxxx)
 or (E128076 "T" AWM 2651 28AWG VW-1 105°C 300V xxxxx)

外被材質/ Material: PVC
 顏色/Color: Gray

Number of Cores	Size of conductor		Thickness (mm±0.05)	Width(mm)	Allowable Error(mm)
	AWG	Composition(Stranded)±0.005mm			
10 P	28	7/0.127	0.9	10.0	±0.30
20 P	28	7/0.127	0.9	20.0	±0.30
22 P	28	7/0.127	0.9	22.0	±0.30
26 P	28	7/0.127	0.9	26.0	±0.30
44 P	28	7/0.127	0.9	44.0	±0.30
50 P	28	7/0.127	0.9	50.0	±0.30
52 P	28	7/0.127	0.9	52.0	±0.30

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 X, ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

HFS-28R1HF-xxx-LF
 SERIES LEADFREE
 010~052WAY
 1 ROLL/100FEET
 28 AWG

DESCRIPTION: FLAT CABLE UL2651-28AWG -PH1.0MM