
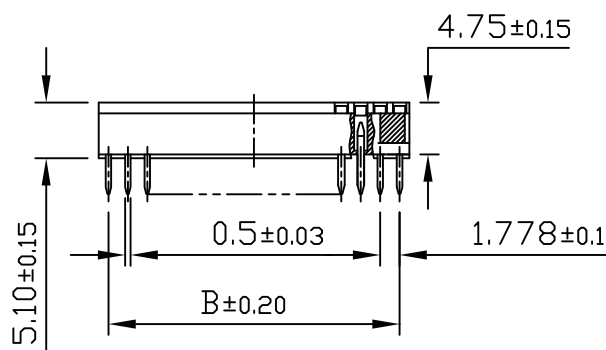


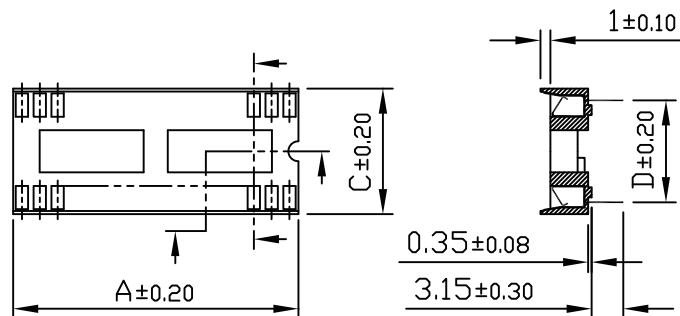

PCB LAYOUT

MATERIAL:

Contact:

phosphor Bronze thickness 0.17mm

Contact Plating: Sn-Cu plated 120u"~200u"

Insulator: PBT-4830 , UL 94V-0

SPECIFICATIONS:

Current Rating : 1A

Dielectric withstanding Voltage : 1000v RMS/minute

Insulator resistance : 5000 Megohms min.

Contact resistance : 20 milliohms initial

30 milliohms after test.

Operating temperatures : -55°C to 85°C

Insertion force : 340g (12 oz) max.per contact.

Withdrawal force : 80g (2.82 oz) min.per contact

PART NO	CKT	A±0.20	B±0.20	C±0.20	D±0.20
HIC-D04-24	24	21.34	19.56	12.65	10.16
HIC-D04-28	28	24.89	23.11		
HIC-D04-30	30	26.67	24.89		
HIC-D04-32	32	28.45	26.67		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HIC-D04-xx-LF
SERIES | T | LEADFREE
24.28.30.32WAY
SPACING 10.16mm
DIP 180°

DESCRIPTION: