

IC Socket, Standard Housing
Pitch 1.778mm, Row 19.05mm
Female, Without Beam

Physical:

Housing: PBT, UL 94V-0

Contact: Brass

Clip: Be-Cu

Specifications:

Voltage Current Rating: 3A, 60V AC/DC

Insulation Resistance: 1000M ohm min

Contact Resistance: 4m ohm max

Dielectric Withstanding Voltage:



AC 500V For 1 Minute

Temperature Rating: -55°C To +125°C

Wave Soldering temperature:

Lead Part: 245±5°C, 5sec

RoHS Part: 260±5°C, 5sec

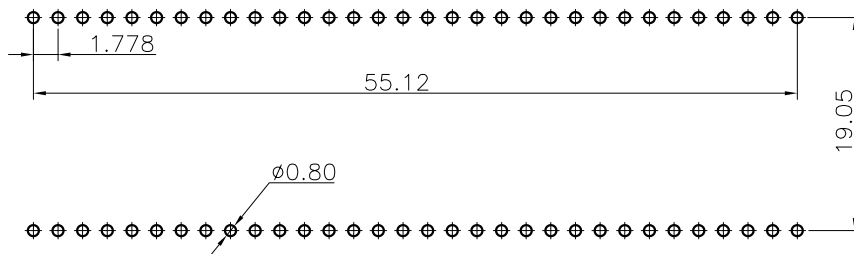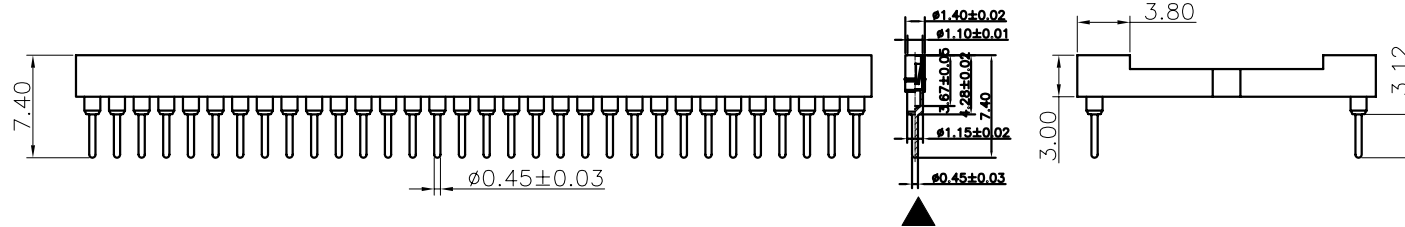

TOP VIEW
PCB LAYOUT RECOMMENDED

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ± 3°

煜倫股份有限公司

www.morethanall.com

ORDER INFORMATION

HIS-D07-64-LF
SERIES | LEADFREE
64WAY
19.05mm
DIP 180°

DESCRIPTION: