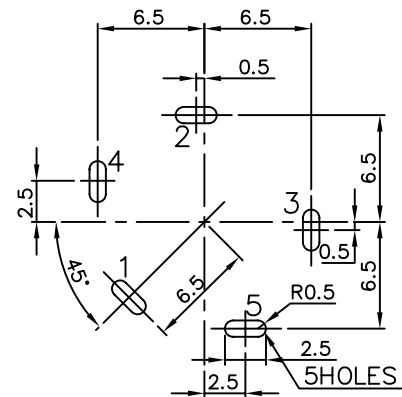


T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

9	NUT	1	H59(COPPER ALLOY)	Ni PLATED
8	WASHER	1	SUS(STAINLESS STEEL)	Ni PLATED
7	AXIS SUPPORT	1	H59(COPPER ALLOY)	Ni PLATED
6	HOUSING	1	ABS	UL-94HB(BLACK)
5	SHUNT TERMINAL	1	C2680 t=0.40	Sn PLATED
4	SHUNT TERMINAL	1	C2680 t=0.40	Sn PLATED
3	RING SPRING	1	C5191 t=0.40	Sn PLATED
2	TIP SPRING	1	C5191 t=0.40	Sn PLATED
1	EARTH SPRING	1	C2680 t=0.30	Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE _____

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

SIZE A4

PPOJECTION 

照片框

ORDER INFORMATION

HJ-D23PBT8NW-05C-LF

Exploded view diagram of a PCB assembly. The components and their dimensions are labeled as follows:

- SERIES**: A small component at the top left.
- LEADFREE**: A component at the top right.
- 5P3C**: A component below LEADFREE.
- WASHER**: A component below 5P3C.
- NUT**: A component below WASHER.
- THREAD 8.0mm**: A dimension line indicating the length of the nut/washer assembly.
- PANEL**: A large rectangular component in the center.
- BACK**: A component at the bottom center.
- BODY HIGH 23.3mm**: A dimension line indicating the height of the panel.

DESCRIPTION:PHONE JACK