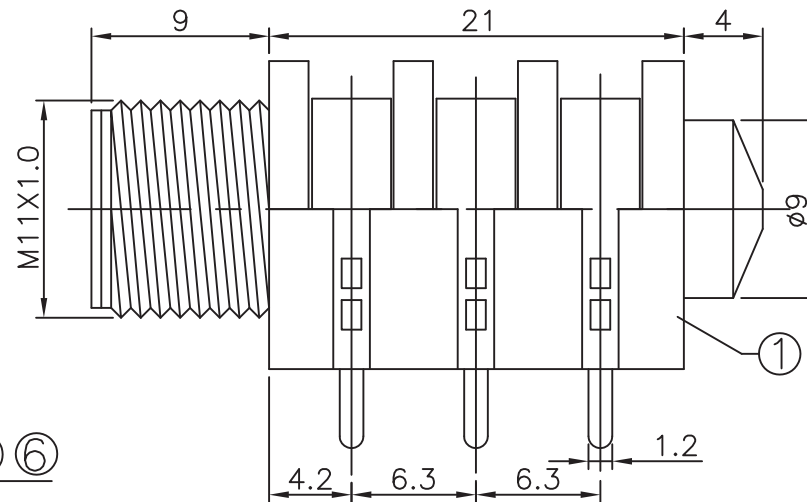
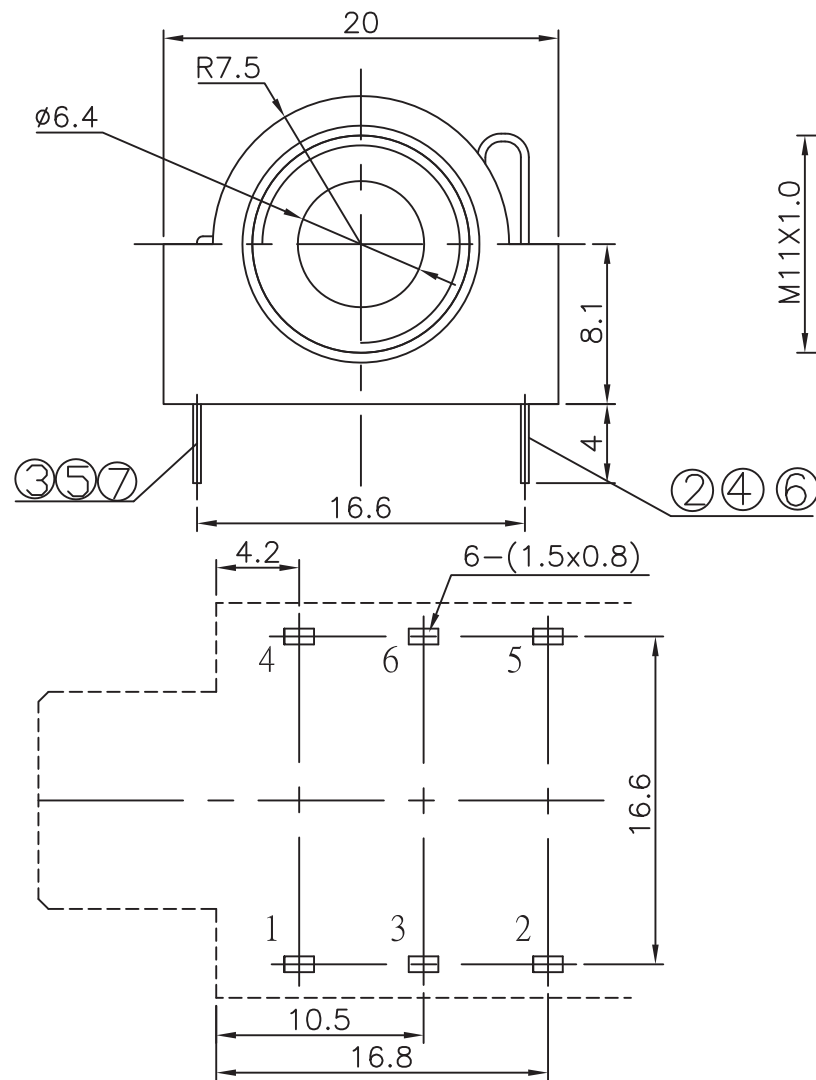


7	CONTACT FOOT	1	C2680	Ag	PLATED
6	SPRING	1	C5191	Sn	PLATED
5	CONTACT FOOT	1	C2680	Ag	PLATED
4	SPRING	1	C5191	Sn	PLATED
3	CONTACT FOOT	1	C2680	Ag	PLATED
2	SPRING	1	C5191	Sn	PLATED
1	HOUSING	1	PBT 4815	UL-94V0(BLACK)	
LTR	PART NAME	QTY	MATERIAL	REMARK	

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-top view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

HJ-R46TN-03-LF
SERIES
DIP 90°
NUT
THREAD
4.2+6.3mm
LEADFREE
03 WAY

DESCRIPTION: PHONE JACK

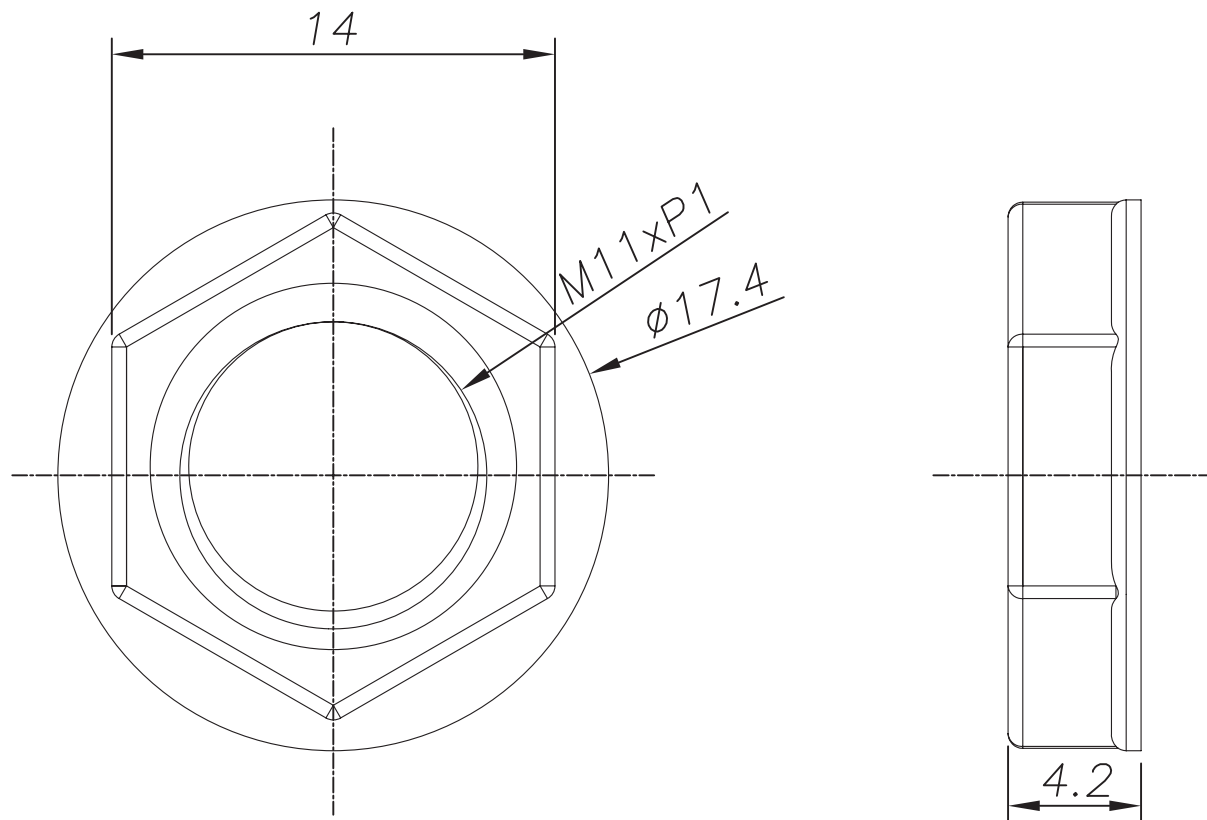

1	SLEEVE NUT	1	PBT 4815	UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION



ORDER INFORMATION

HJ-R46TN-03-LF
SERIES
DIP 90°
NUT
THREAD
4.2+6.3mm
LEADFREE
03 WAY

DESCRIPTION: PHONE JACK