
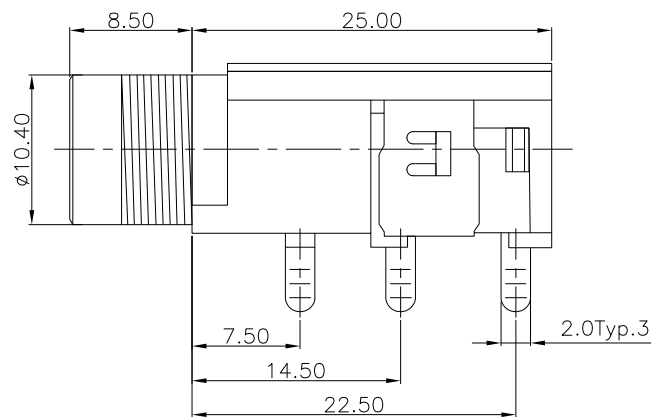


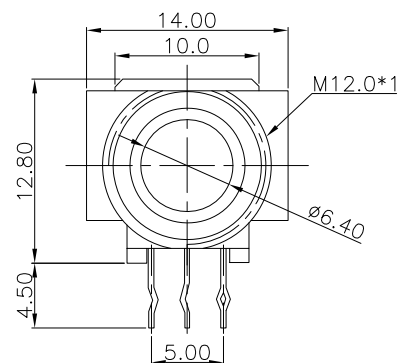


MATERIALS


HOUSING : PLASTICS, UL94 V-0
CONTACT PIN : COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 250V
OPERATION TEMPERATURE: -25°C~+85°C
DURABILITY: 5000 CYCLES.

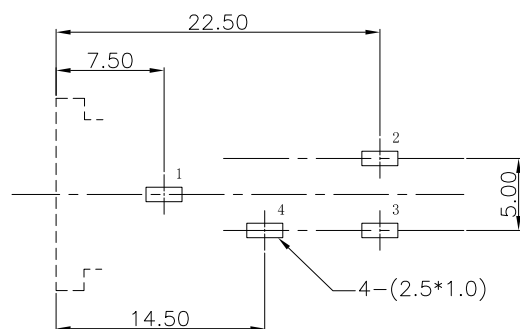

P.C.B LAYOUT
TOP VIEW



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HJ-R715P-04C-LF
SERIES 4P3C LEADFREE
PLASTIC
7.5+15mm
DIP 90°

DESCRIPTION: DIA. 6.35mm PHONE JACK, PCB MOUNT, RIGHT ANGLE DIP