

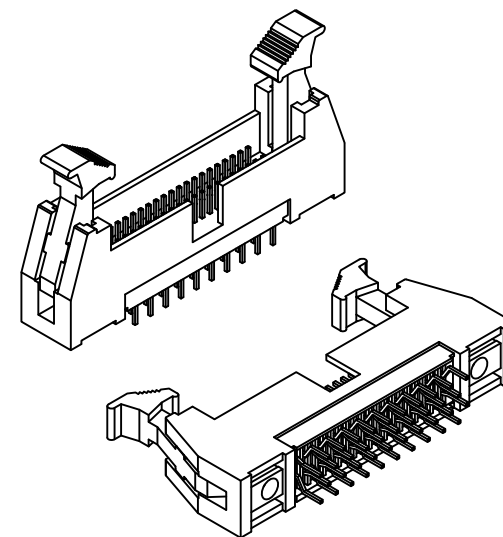
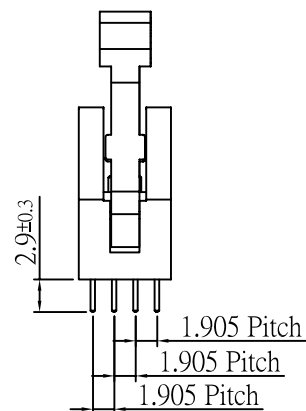
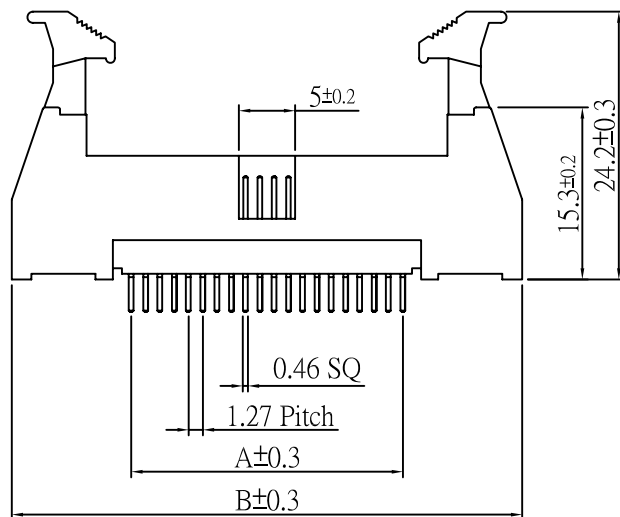


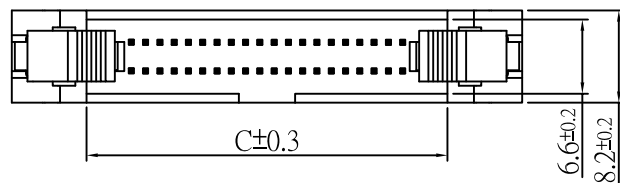

Contract:
Contact:Brass.
Insulator:PBT.
Finish:Gold or Tin over Nickel Plated.

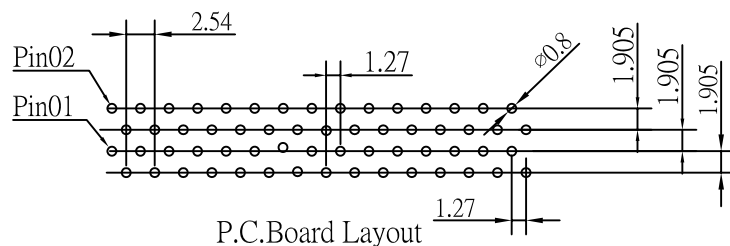

Circuits	Dimension		
	A	B	C
16	8.89	29.96	16.67
20	11.43	32.50	19.21
40	24.13	45.20	31.91
44	26.67	47.74	34.45
60	36.83	57.90	44.61
80	49.53	70.60	57.31
100	62.23	83.30	70.01

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

HL-D4-xxx-LF
SERIES LEADFREE
016~100 WAY
4 ROW
DIP 180°

DESCRIPTION: 1.27-2.54 PITCH SHROUDED HEADER Long Lever