

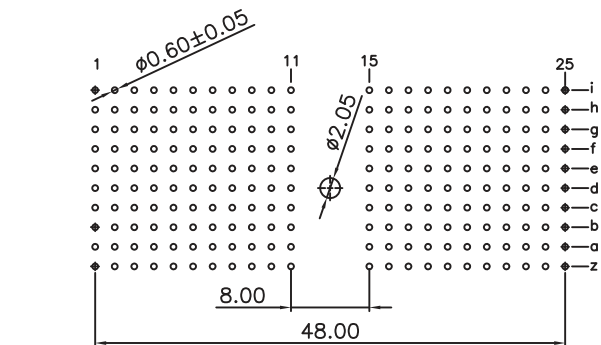
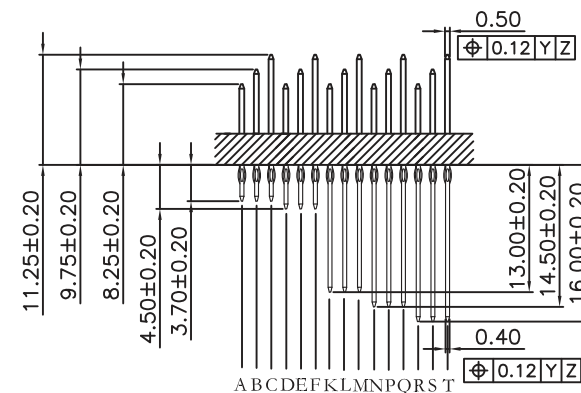
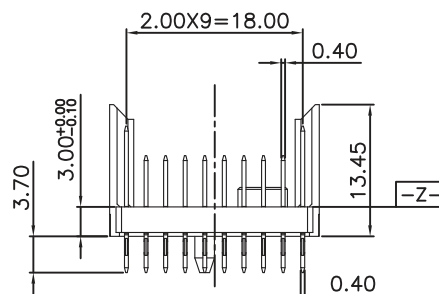
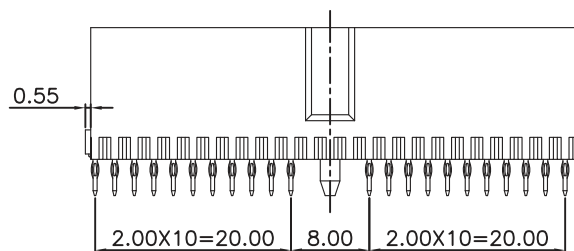
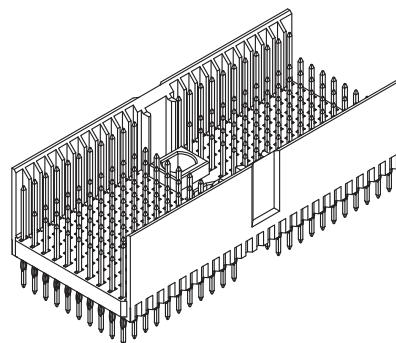
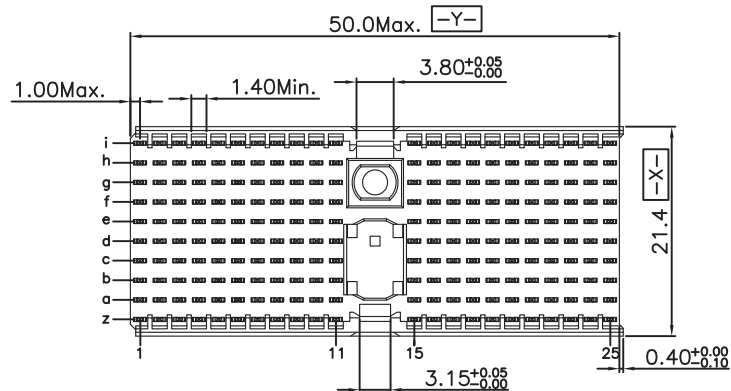


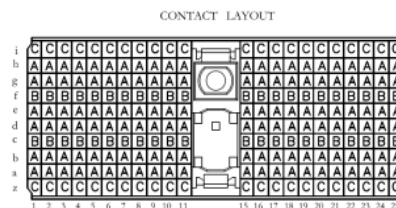

P.C. Board Layout
(Top View)

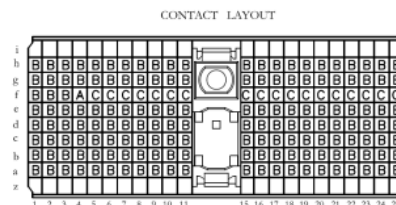

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 750V For 1 minute.
Insulator Resistance: 10000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C~+125°C .

*RoHS Compliant

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

HM10D-PPxyyy-xxx-LF

SERIES

LEADFREE

03:3.70mm PRESS FIT

176:176WAY

04:4.50mm PRESS FIT

220:220WAY

13:13.00mm PRESS FIT

ABC:ABC CONTACT

14:14.50mm PRESS FIT

16:16.00mm PRESS FIT

MALE PRESS FIT

DESCRIPTION: Hard Metric Connector Male Type D

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com