

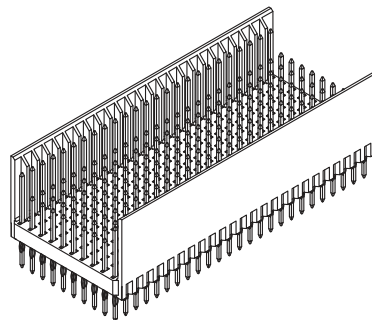



CONTACT LAYOUT

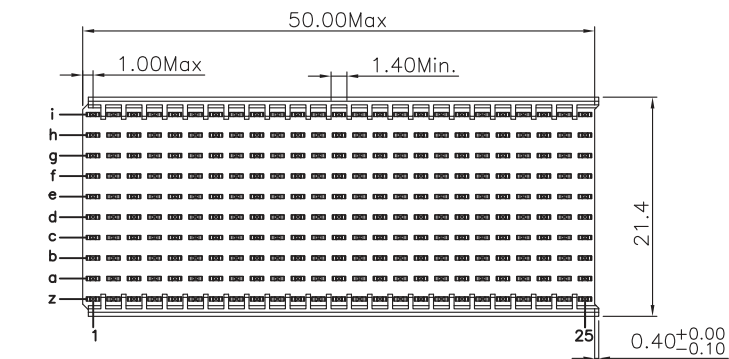

P.C. Board Layout
(Top View)

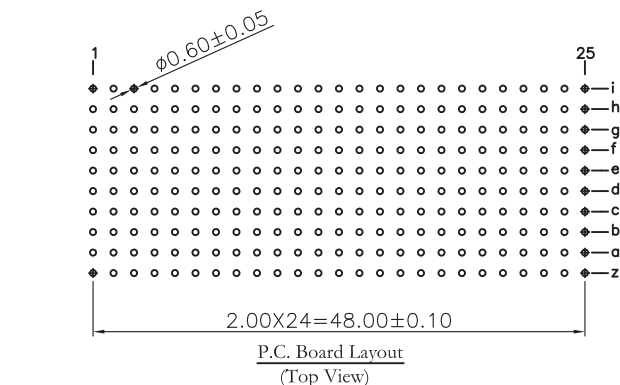

250 AC

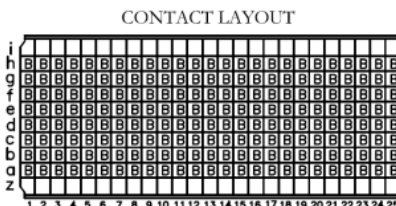

200 B

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 AMP.


Dielectric Withstanding Voltage: AC 750V For 1 minute.

Insulator Resistance: 10000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

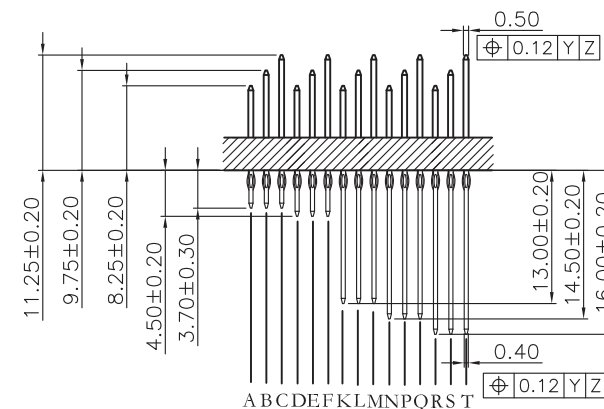

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

HM10E-PPxxyy-xxx-LF

SERIES

LEADFREE

03:3.70mm PRESS FIT

200:200WAY

04:4.50mm PRESS FIT

250:250WAY

13:13.00mm PRESS FIT

AC:AC CONTACT

14:14.50mm PRESS FIT

B:B CONTACT

16:16.00mm PRESS FIT

DESCRIPTION: Hard Metric Connector Male Type E

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com