



**Material:**

Housing: Thermoplastic Polyester Glass Filled UL94V-0.  
Contacts: Copper Alloy.


**Electrical Characteristics:**

Current Rating: 1 AMP.  
Dielectric Withstanding Voltage: AC 750V For 1 minute.  
Insulator Resistance: 10000MΩ min. at DC 500V.  
Contact Resistance: 20mΩ max. at DC 100mA.  
Operating Temperature: -55°C ~+125°C .


**\*RoHS Compliant**

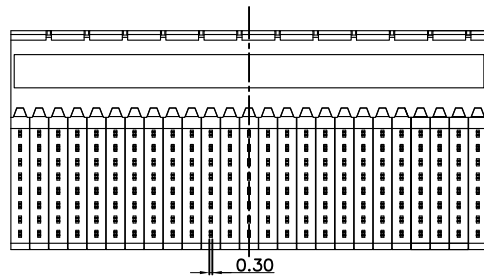


None Shielded



With Top Body Shielded



With Top Body Shielded and Bottom Shielded

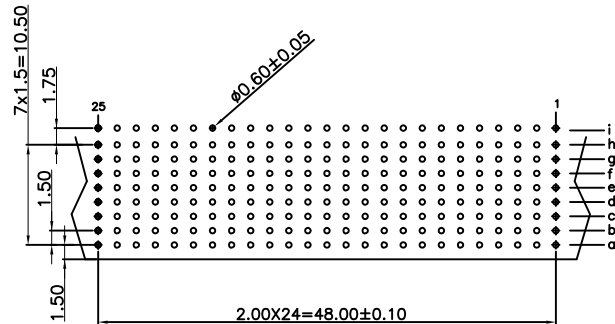

P.C. Board Layout  
(Top View)

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT / mm SCALE 1 : 1  
DATE  
SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION

照片框

**ORDER INFORMATION**

HM10E-SQx-200-LF

SERIES | | | LEADFREE  
200 WAY  
FEMALE | X:NON / SHIELDED  
| T:TOP / SHIELDED  
| A:TOP / BOTTOM / SHIELDED  
90° PRESS FIT

DESCRIPTION: