

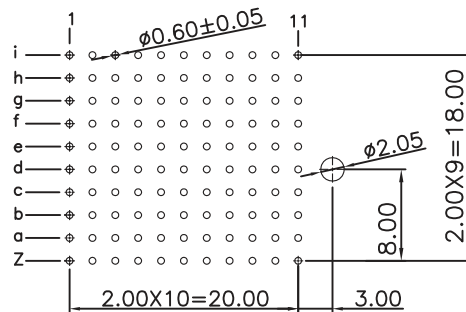
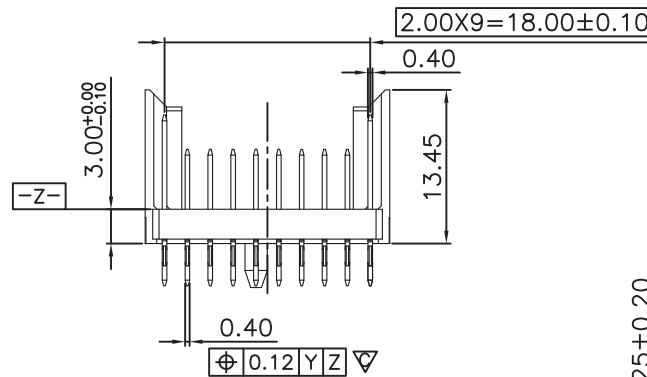
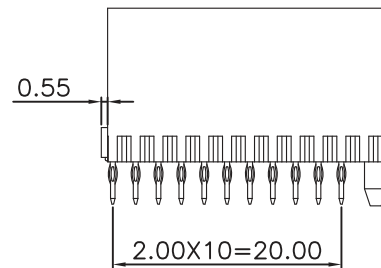
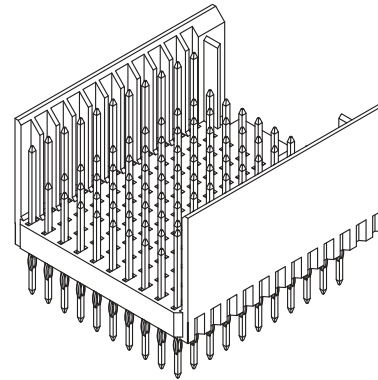
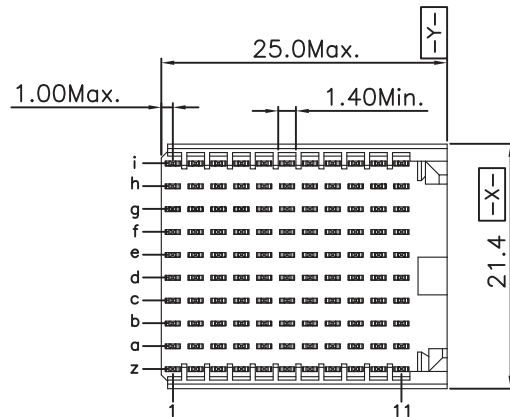
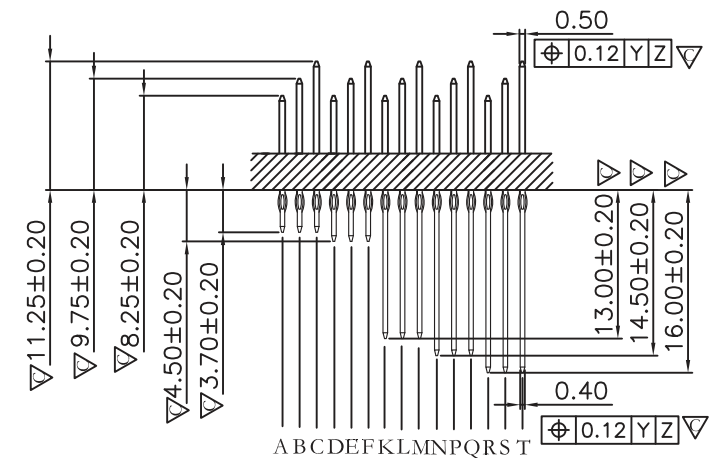




P.C. Board Layout
(Top View)



Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 750V For 1 minute.
Insulator Resistance: 10000MΩ min.at DC 500V.
Contact Resistance: 20mΩ max.at DC 100mA.
Operating Temperature: -55°C ~ +125°C.

***RoHS Compliant**

RoHS Compliant

TOLERANCES ARE

X. ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

HM10F-PPxyyy-xxx-LF

SERIES

03:3.70mm PRESS FIT
04:4.50mm PRESS FIT
13:13.00mm PRESS FIT
14:14.50mm PRESS FIT
16:16.00mm PRESS FIT

LEADFREE

088:88WAY

110:110WAY

ABC:ABC CONTACT

AB:AB CONTACT

MALE PRESS FIT

DESCRIPTION: Hard Metric Connector Male Type F

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com