
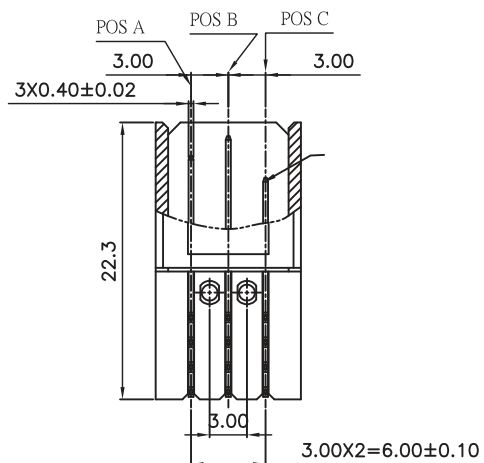

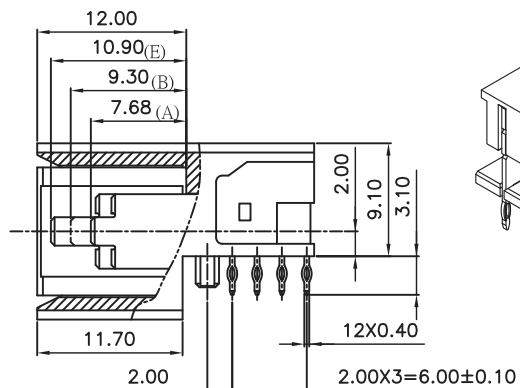




Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy

Electrical Characteristics:

Current Rating: 7.8 AMP.


Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 10000MΩ min. at DC 500V.

Contact Resistance: 20mΩ max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

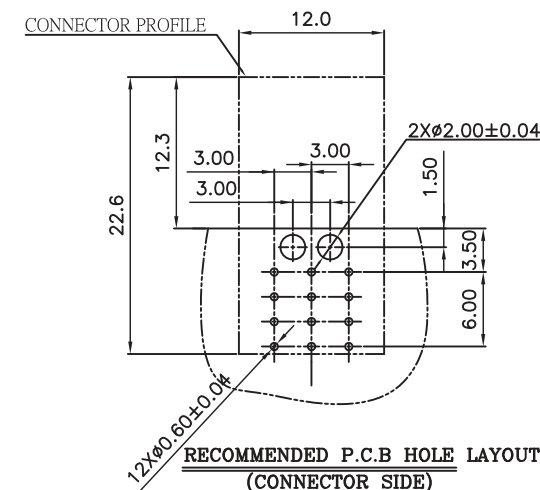

Pin Assembly Type Schematic	PCB	PCB	PCB	PCB	PCB	PCB	PCB	PCB	PCB
Part No.	HM3P-PQ-03LLL	HM3P-PQ-03LML	HM3P-PQ-03MLM	HM3P-PQ-03MLS	HM3P-PQ-03MSL	HM3P-PQ-03SLS	HM3P-PQ-03MSM	HM3P-PQ-03LMM	HM3P-PQ-03SSS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HM3P-PQ-03xxx-LF

SERIES

MALE

LEADFREE

LLL TYPE

SSS TYPE

03 WAY

90° PRESS FIT

DESCRIPTION: Power Modules Male Press Fit Type