
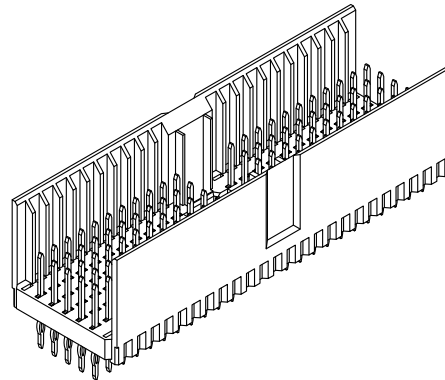


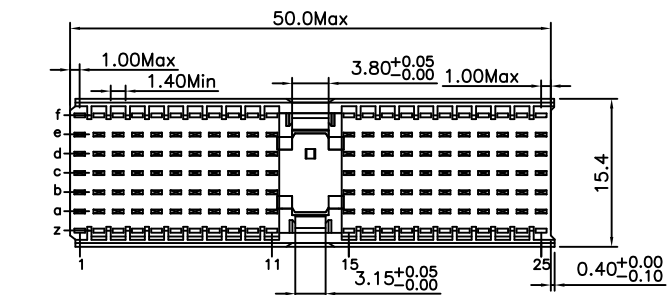

Material:

Housing: 30% Glass Filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:




Current Rating: 1 AMP.

Dielectric Withstanding Voltage: AC 750V For 1 minute.


Insulator Resistance: 10000M Ω min.at DC 500V.

Contact Resistance: 20m Ω max.at DC 100mA.


Operating Temperature: -55°C ~ +105°C .

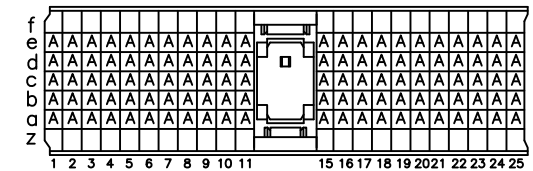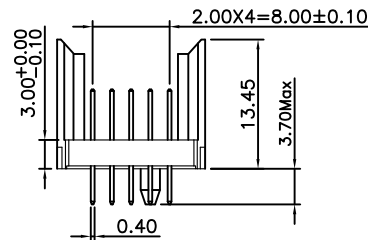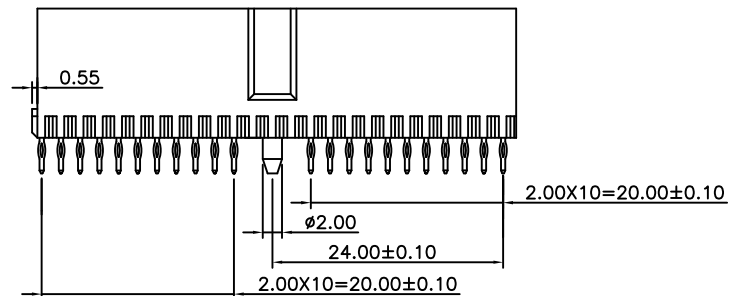

CONTACT LAYOUT

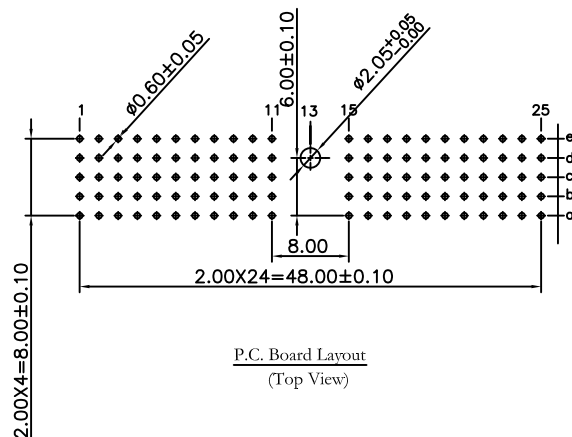

P.C. Board Layout
(Top View)



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

HM7A-PP03A-110-LF

SERIES

110

WAY

LEADFREE

A TYPE

3.7mm

PRESS FIT

MALE

DESCRIPTION: Hard Metric Connector Male Type A