


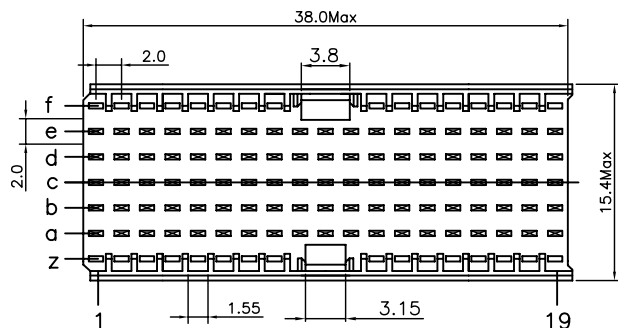



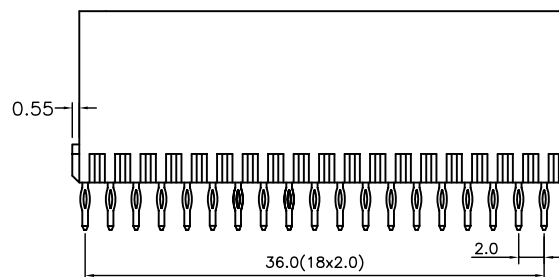

f																			
e	C	A	A	A	A	C	A	A	A	A	C	A	A	A	A	A	A	A	A
d	A	A	A	A	A	A	A	C	A	C	A	A	A	A	A	A	A	A	A
c	A	A	A	A	A	C	C	A	A	A	A	A	A	A	A	A	A	A	A
b	A	A	A	A	A	A	A	C	A	C	A	A	A	A	A	A	A	A	A
a	C	A	A	A	C	A	A	A	A	C	A	A	A	A	A	A	A	A	A
z																			
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19



F: F Option

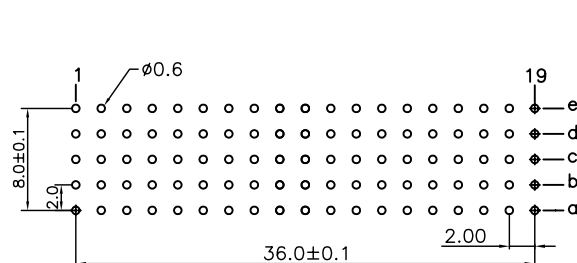

P.C. Board Layout
(Top View)

Material:

Housing: 30% Glass Filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:

Insulator Resistance: 1000MΩmin.

Contact Resistance: 20mΩmax.

Operating Temperature: -55°C ~ +125°C.

*RoHS Compliant

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HM7AB-PP03AC-095C-LF

SERIES

AC TYPE

95 WAY

LEADFREE

3.7mm

PRESS FIT

MALE

DESCRIPTION: