

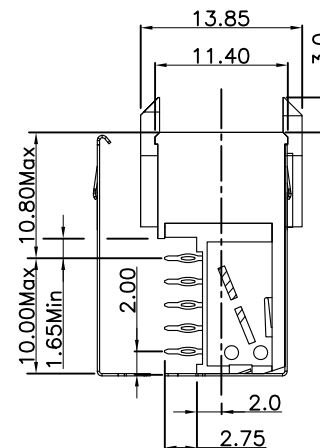
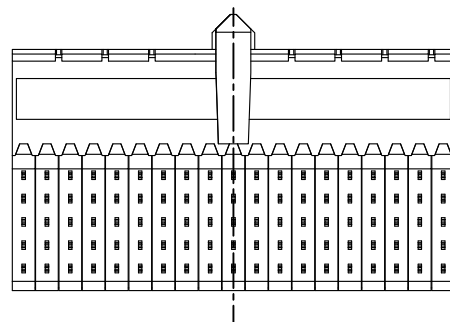
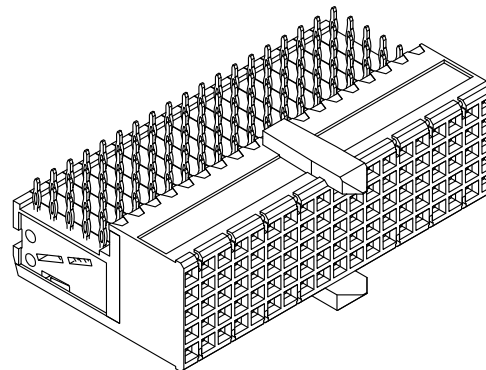


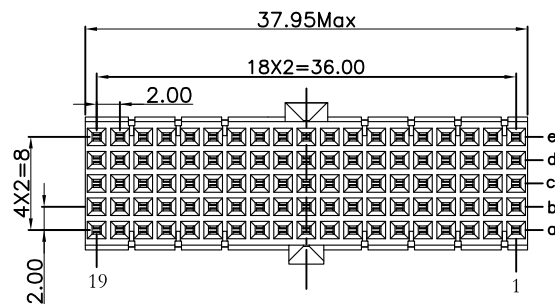

With Top Body Shielded
and Bottom Shielded

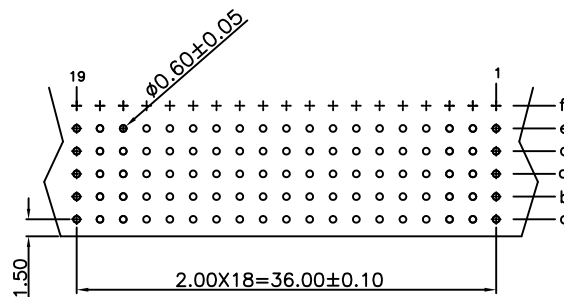

P.C. Board Layout
(Top View)

Material:

Housing: 30% Glass filled PBT UL94V-0.
Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 750V For 1 minute.
Insulator Resistance: 10000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C ~ +105°C.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HM7AB-SQA-095-LF

SERIES

LEADFREE

95 WAY

WITH TOP BODY SHIELDED
AND BOTTOM SHIELDED
90° PRESS FIT
FEMALE

DESCRIPTION: