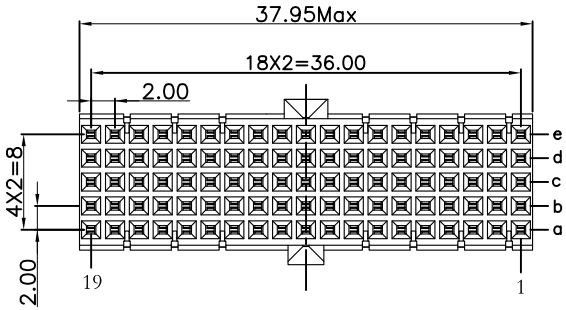

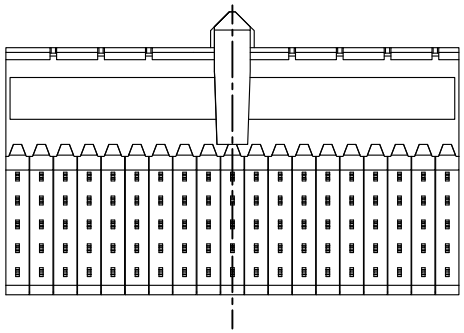

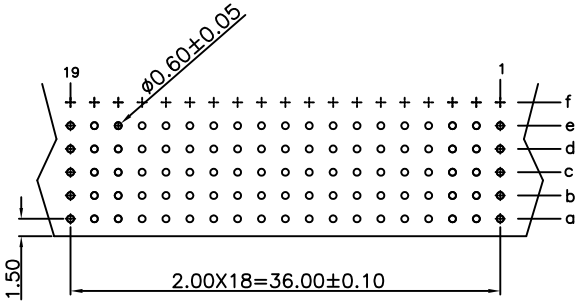

P.C. Board Layout
(Top View)

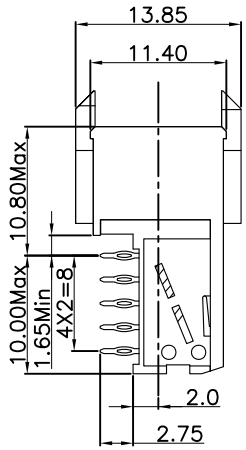

None Shielded

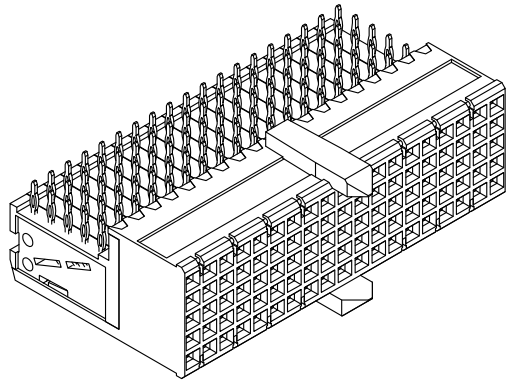

Material:

Housing: 30% Glass filled PBT UL94V-0.
Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 1 AMP.
Dielectric Withstanding Voltage: AC 750V For 1 minute.
Insulator Resistance: 10000MΩ min. at DC 500V.
Contact Resistance: 20mΩ max. at DC 100mA.
Operating Temperature: -55°C ~+105°C .
***RoHS Compliant**

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
DATE		.XX ±
		.XXX ±
		ANG ±
SIZE A4	PPOJECTION	



ORDER INFORMATION

HM7AB-SQT-095-LF

SERIES
90° PRESS FIT
FEMALE
WITH TOP BODY SHIELDED
125 WAY
LEADFREE

DESCRIPTION: