


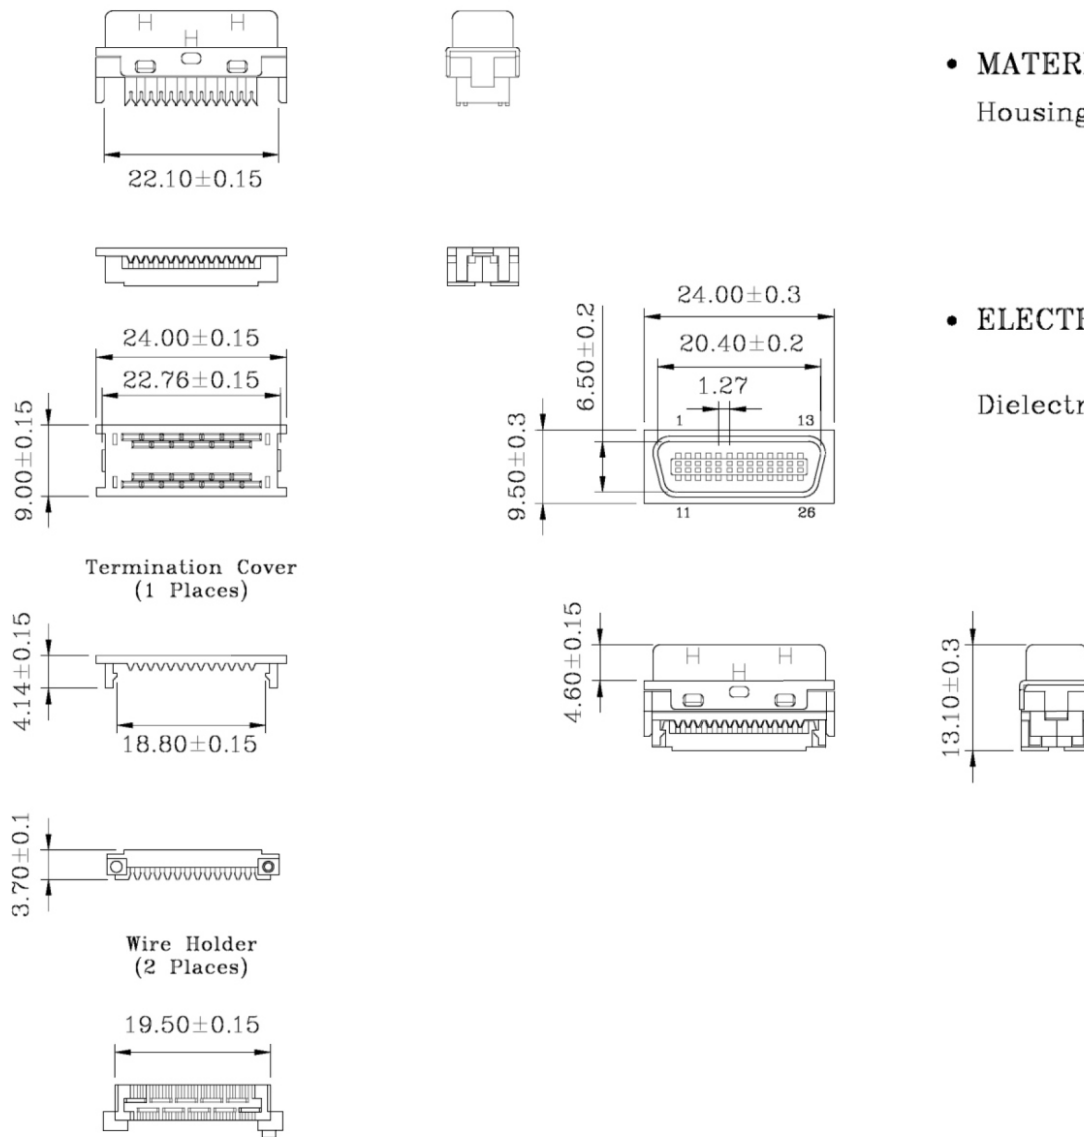

• MATERIALS:(RoHS Compliant)

Housing And Cover: Plastic thermoplastic
P.B.T UL94V-0 black
Contacts: Phosphor bronze gold
selective plated
Front Shell: Steel nickel plated
over copper

• ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +105°C

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

HPC-PF-026-LF
SERIES T LEADFREE
26 WAY
IDC
MALE

DESCRIPTION:1.27mm(.050") Pitch Centronic 26P Male Connector I.D.C Assembly Type

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION