

● **MATERIALS:** (RoHS Compliant)

Housing And Cover: Plastic Thermoplastic
P.B.T UL94V-0 Black

**Contacts: Phosphor Bronze Gold
Selective Plated**

Front Shell: Steel Nickel Plated
Over Copper

● **ELECTRICAL CHARACTERISTICS:**


Contact Current Rating: 0.5 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: $>500\text{M}\Omega/\text{Min}$

Contact Resistance: 35mΩ/Max

Operation Temperature: $-55^{\circ}\text{C} \sim +85^{\circ}\text{C}$

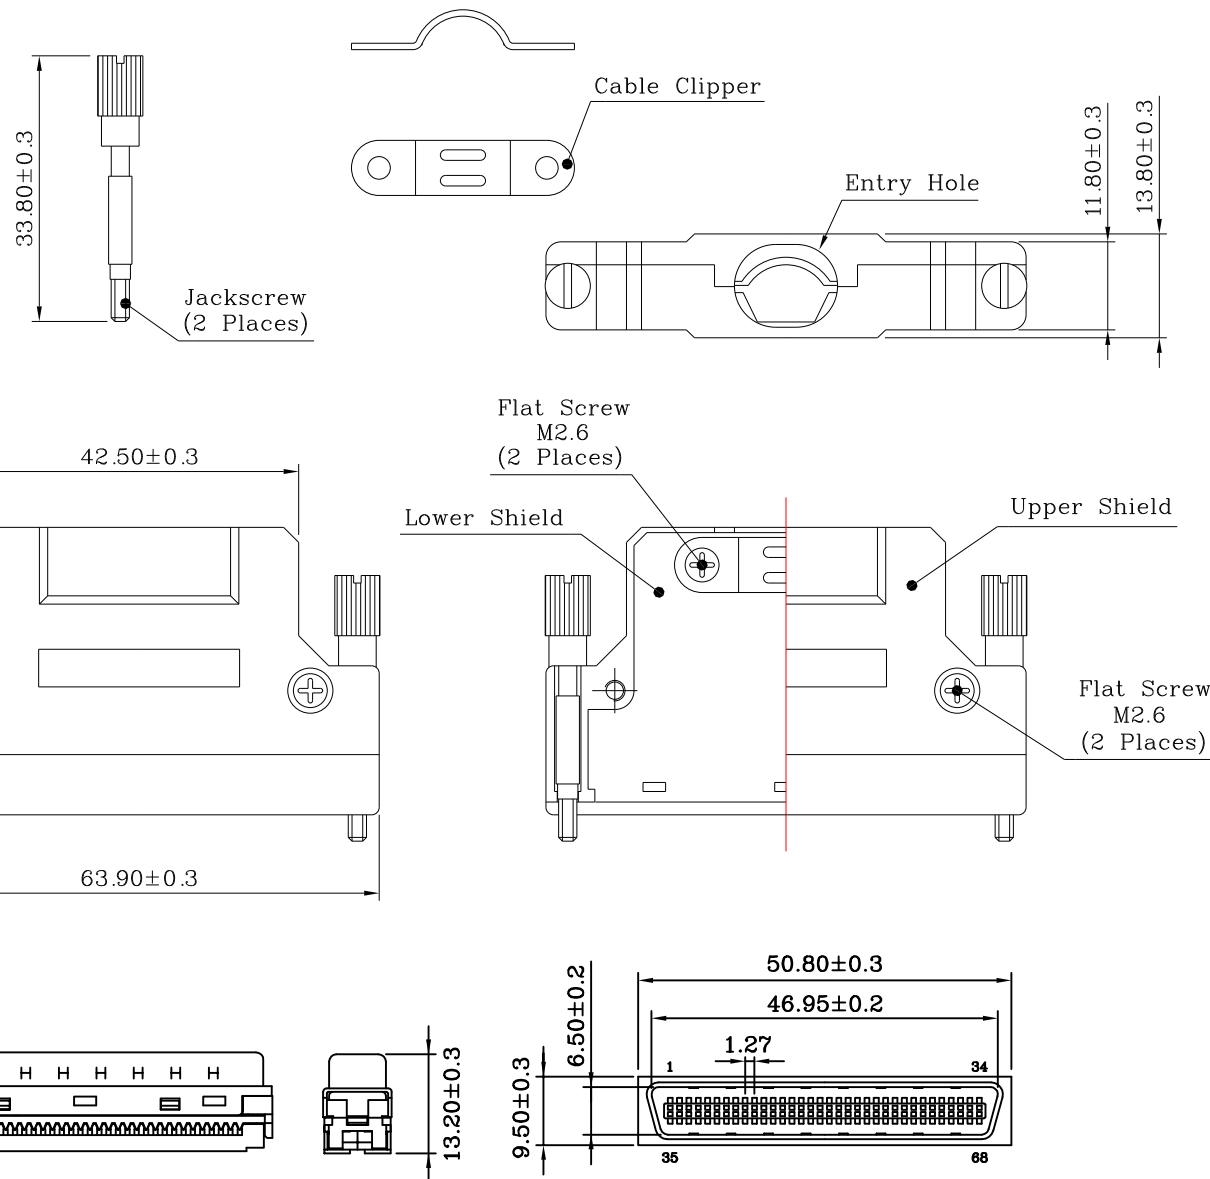

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

 $X_{\pm}$

CHECKED BY GENIUS

$$\lambda \pm \gamma$$

UNIT / mm

SCALE 1 : 1

DATE _____

ANG ±

SIZE A4

PPOJECTION 

ORDER INFORMATION

HPC-PFM-068-LF

SERIES | | | | LEADFREE

68 WAY

METAL COVER

IDC

MALE

照片框

DESCRIPTION:	1.27mm(.050") Series Shielded Backshell Kits 68 Pos Straight Exit With Jackscrew
--------------	---