

● **MATERIALS: (RoHS Compliant)**

Hood: Plastic Thermoplastic ABS UL 94V-0

Jackscrews: Steel Nickel Plated Over Copper

Jackscrews Hood: PVC

Inner Shell: Steel Nickel Plated Over Copper

● **ELECTRICAL CHARACTERISTICS:**










Contact Current Rating: 0.5 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: >500M Ω /Min

Contact Resistance: 35m Ω /Max

Operation Temperature: -55°C ~ +85°C

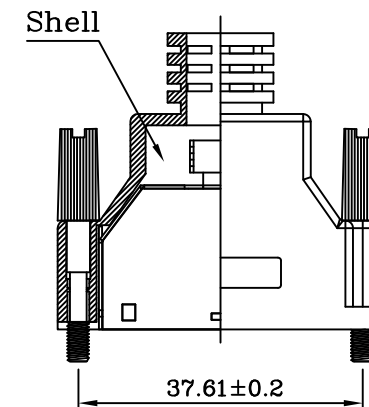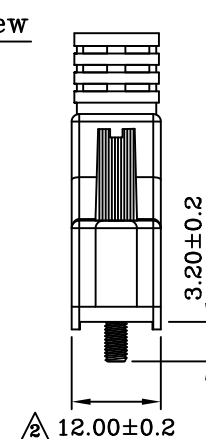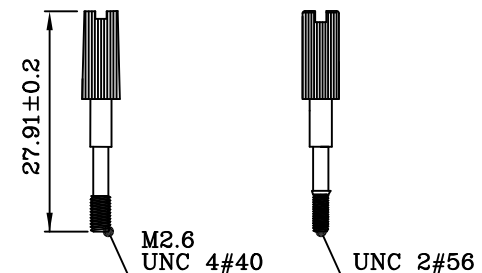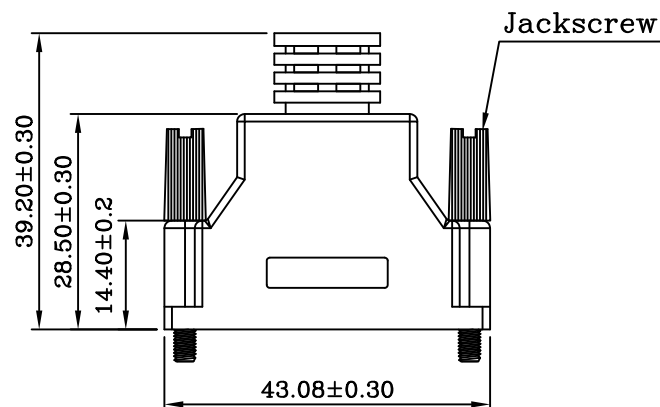

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

ORDER INFORMATION

HPC-PFMBK-036-LF
SERIES | LEADFREE
36 WAY
BLACK
METAL COVER
IDC
MALE

DESCRIPTION: 1.27mm(.050") Series 36Pos Plastic Hood With Jackscrews