

• **MATERIALS:(RoHS Compliant)**

Housing And Cover: Plastic Thermoplastic
P.B.T UL94V-0 Black

Contacts: Phosphor Bronze Gold
Selective Plated

Front Shell: Steel Nickel Plated
Over Copper

• **ELECTRICAL CHARACTERISTICS:**








Contact Current Rating: 1 Amp

Dielectric Withstanding Voltage: 500V AC



Insulation Resistance: >500MΩ/Min

Contact Resistance: 35mΩ/Max

Operation Temperature: -55°C ~ +105°C



Termination Cover
(1 Places)



Wire Holder
(2 Places)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±





ORDER INFORMATION

HPC-PFQ-026-LF
SERIES LEADFREE
26 WAY
Q TYPE COVER
IDC
MALE

DESCRIPTION: 1.27mm (.050") Ribbon 26Pos
Cable Plug Connector I.D.C Assembly Type

• **MATERIALS:(RoHS Compliant)**






Hood: Plastic Thermoplastic ABS UL 94V-0
 Latch Cover: Plastic Thermoplastic ABS UL 94V-0
 Latch: Stainless Steel
 Inner Shell: Steel Nickel Plated Over Copper

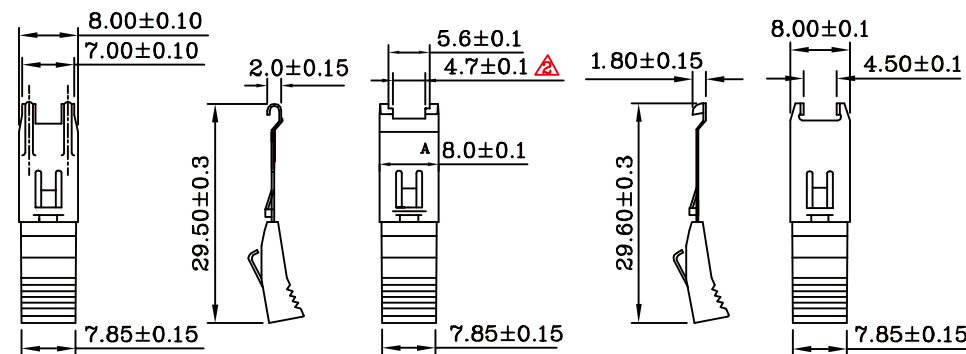

LS: Fish Hooks

LS1: Fish Hooks

SS: Flag Hooks

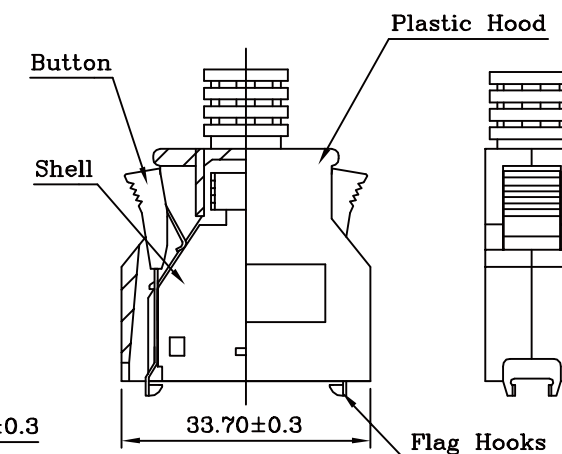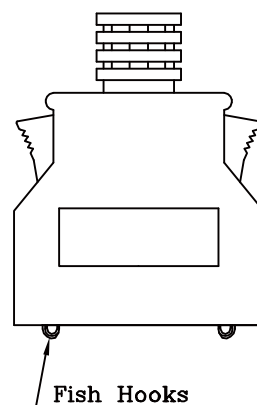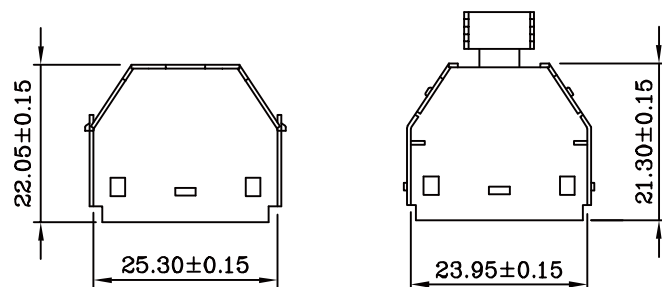

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PJECTION

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

HPC-PFQ-026-LF
 SERIES LEADFREE
 26 WAY
 Q TYPE COVER
 IDC
 MALE

DESCRIPTION: 1.27mm(.050") Series
 26Pos Plastic Hood With Spring Latches