

FEATURES:

- Half pitch 1.27mm(.050) series
- Centronic female connector I.D.C type for cable
- Panel mount receptacle assemblies bracket with latch block








- Fully EMI/RFI shielded

MATERIALS:

- Housing : Plastic thermoplastic P.B.T UL94V-0 black
- Contacts: Phosphor bronze gold selective plated
- Front Shell: Steel, Nickel plated over copper
- Latch: Steel, Nickel plated over copper

ELECTRICAL:

- Current Rating: 1 Amp
- Insulation Resistance: 500M Ω /Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35m Ω Max
- Temperature Range: -55 $^{\circ}$ C ~ +105 $^{\circ}$ C

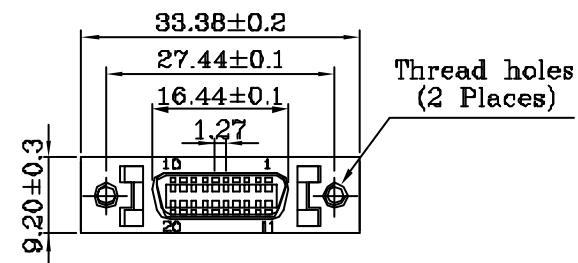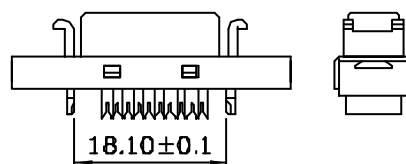

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

HPC-SFL-020-LF
SERIES
LEADFREE
20 WAY
LOCK
IDC
FEMALE

DESCRIPTION: 1.27mm(.050") Pitch Centronic 20P Female Connector I.D.C Type