

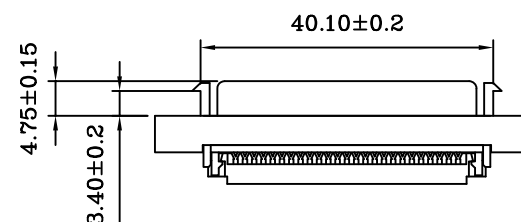
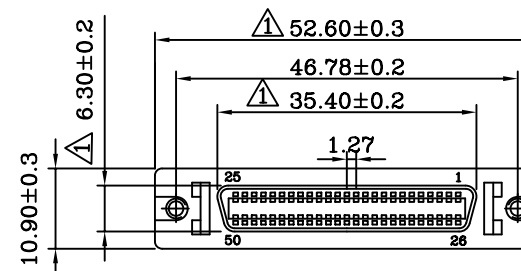

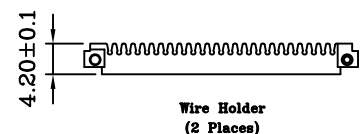

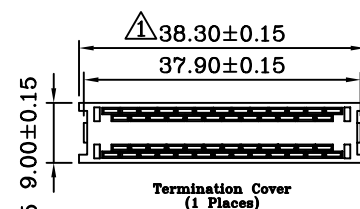


• **MATERIALS:(RoHS Compliant)**

Housing And Cover: Plastic thermoplastic
P.B.T UL94V-0 black
Contacts: Phosphor bronze gold
selective plated
Bracket : Die-Cast zinc nickel
plated over copper

• **ELECTRICAL CHARACTERISTICS**

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500M Ω /Min
Contact Resistance: 35m Ω /Max
Operation Temperature: -55°C ~ +105°C

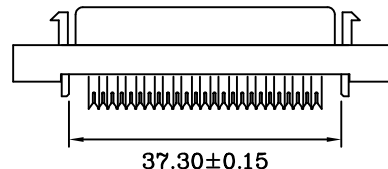

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

HPC-SFL-050-LF
SERIES | LEADFREE
50 WAY
LOCK
IDC
FEMALE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

DESCRIPTION: 1.27mm (.050") Ribbon 50Pos Cable Receptacles Connector I.D.C Type