

• **MATERIALS:(RoHS Compliant)**

Housing And Cover : Plastic Thermoplastic
P.B.T UL94V-0 Black

Contacts : Phosphor Bronze Gold
Selective Plated

Bracket : Zinc Alloy Nickel
Plated Over Copper

• **ELECTRICAL CHARACTERISTICS:**


Contact Current Rating: 1 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: >500MΩ/Min

Contact Resistance: 35mΩ/Max

Operation Temperature: -55°C ~ +105°C

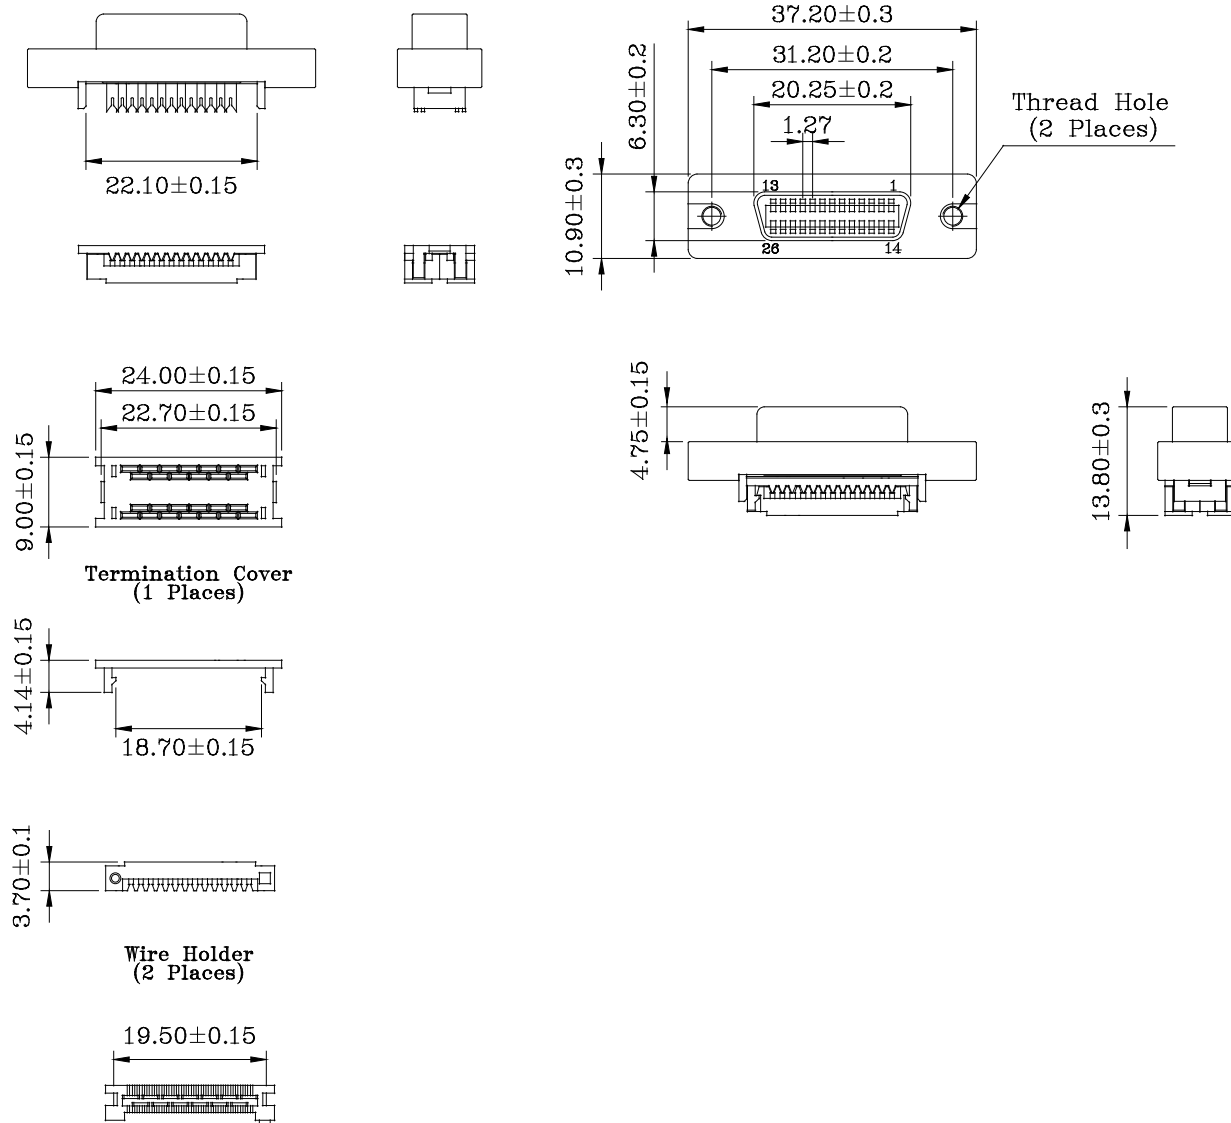

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HPC-SFX-026-LF
SERIES | LEADFREE
26 WAY
NON LOCK
IDC
FEMALE

DESCRIPTION: 1.27mm (.050") Ribbon 26Pos Cable Receptacles Connector I.D.C Type