
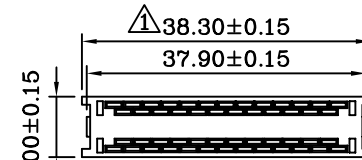
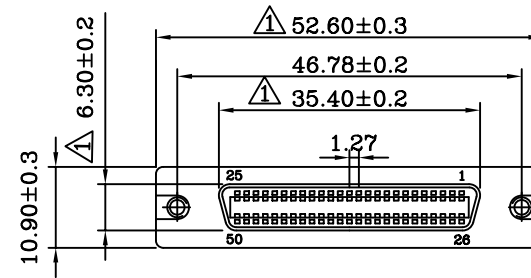

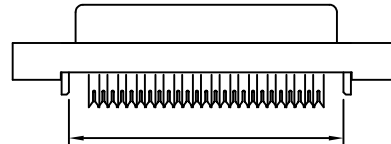


• **MATERIALS:(RoHS Compliant)**


Housing And Cover: Plastic thermoplastic  
 P.B.T UL94V-0 black  
 Contacts: Phosphor bronze gold  
 selective plated  
 Bracket : Die-Cast zinc nickel  
 plated over copper

• **ELECTRICAL CHARACTERISTICS**





Contact Current Rating: 1 Amp  
 Dielectric Withstanding Voltage: 500V AC  
 Insulation Resistance: 500MΩ/Min  
 Contact Resistance: 35mΩ/Max  
 Operation Temperature: -55°C ~ +105°C



Termination Cover  
(1 Places)

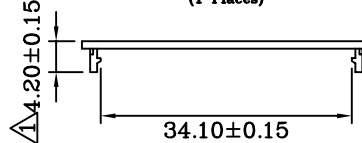

Wire Holder  
(2 Places)

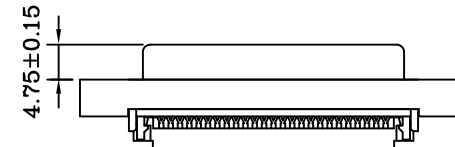

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X.±  
 .X±  
 .XX±  
 .XXX±  
 ANG±

照片框

ORDER INFORMATION

HPC-SFX-050-LF  
 SERIES | LEADFREE  
 | 50 WAY  
 | NON LOCK  
 | IDC  
 | FEMALE

DESCRIPTION: 1.27mm (.050") Ribbon 50Pos Cable Receptacles Connector I.D.C Type

煜倫股份有限公司

www.morethanall.com