

● MATERIALS: (RoHS Compliant)

Housing And Cover: Plastic Thermoplastic
P.B.T UL94V-0 Black

Contacts: Phosphor Bronze Gold
Selective Plated

Front Shell: Steel Nickel Plated
Over Copper

Bracket: Steel Nickel Plated
Over Copper

Boardlock: Brass Tin Plated
Over Copper

● ELECTRICAL CHARACTERISTICS:



Contact Current Rating: 0.5 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: >500MΩ/Min

Contact Resistance: 35mΩ/Max

Operation Temperature: -55°C ~ +85°C

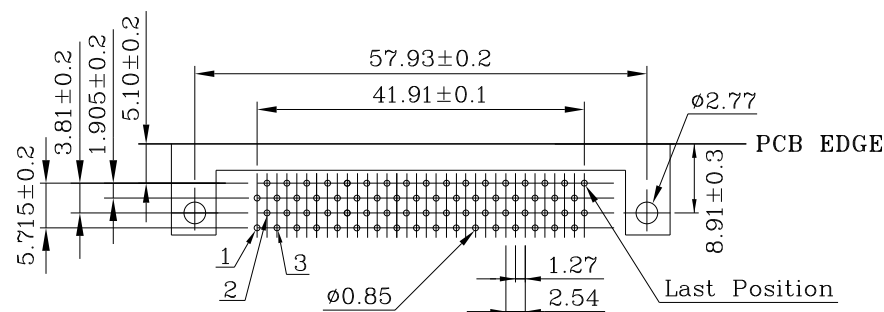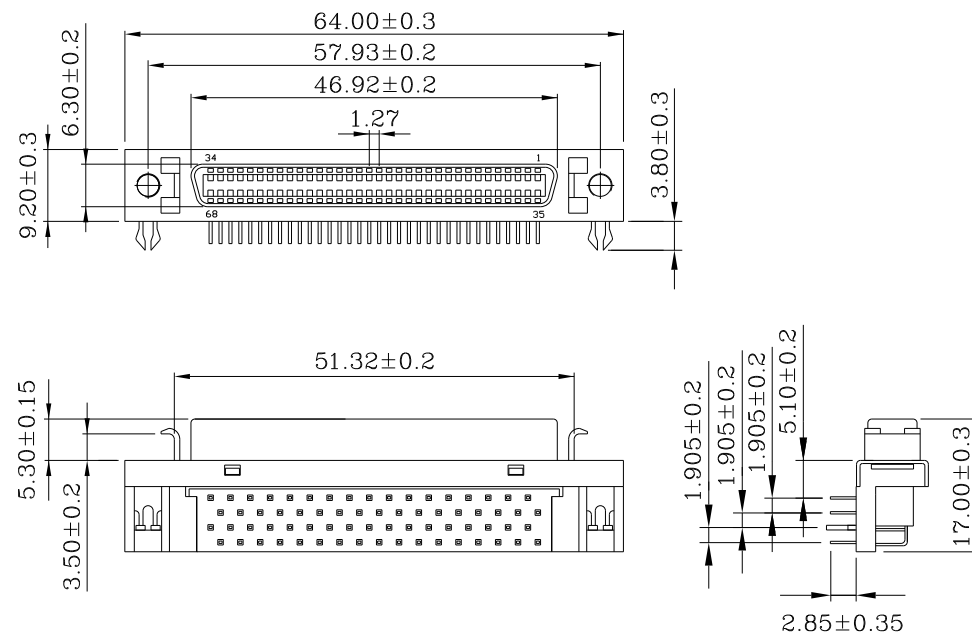

PCB Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG, ±

PPOJECTION

照片框

ORDER INFORMATION

HPC-SRL-068-LF

SERIES

LEADFREE

68 WAY

LOCK

DIP 90°

FEMALE

DESCRIPTION: 1.27mm (.050") Ribbon 68Pos
Receptacles Headers Right-Angle Mount Type