


• MATERIALS:(RoHS Compliant)


Housing And Cover : Plastic thermoplastic
P.B.T UL94V-0 black
Contacts : Phosphor bronze gold
selective plated
Front Shell : Steel nickel plated
over copper
Boardlock : Brass Tin plated
over copper
Bracket : Steel nickel plated
over copper

• ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500M Ω /Min
Contact Resistance: 35m Ω /Max
Operation Temperature: -55°C ~ +105°C

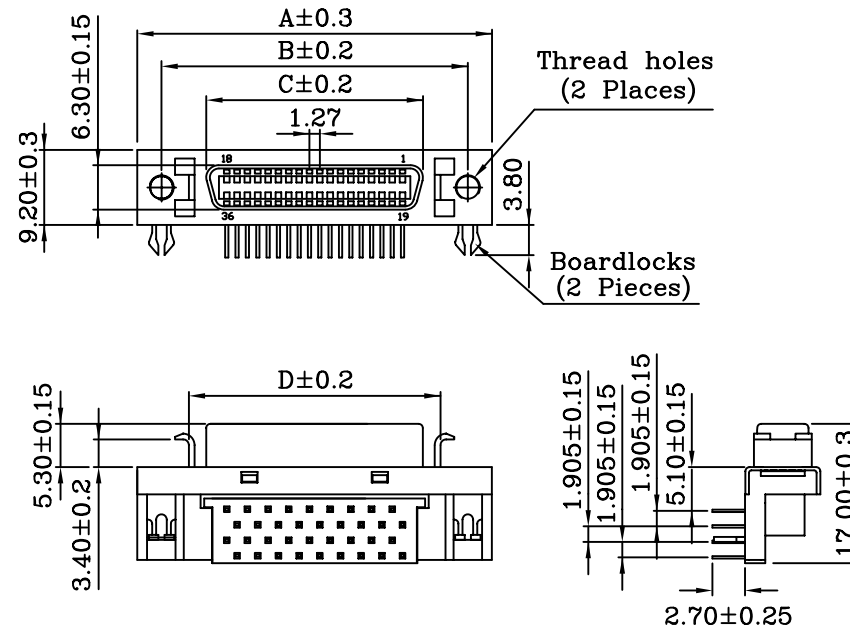

NO OF CONTACTS	A	B	C	D	E	F
20	33.40	27.40	16.44	20.83	27.45	11.43
36	43.54	37.61	26.60	31.05	37.61	21.59
68	64.00	57.92	46.92	51.32	57.60	41.91
100	84.18	78.23	67.10		78.10	62.23

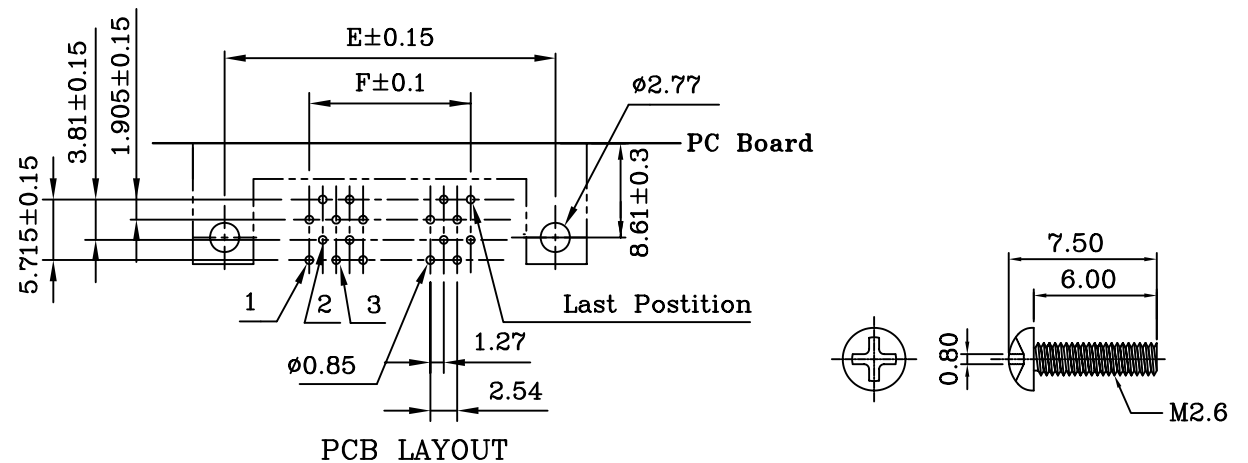

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

HPC-SRLM-xxx-LF
SERIES LEADFREE
20.36 .68.100WAY
MALE SCREW
LOCK
DIP 90°
FEMALE

DESCRIPTION: Receptacles Headers Right-Angle Mount Type