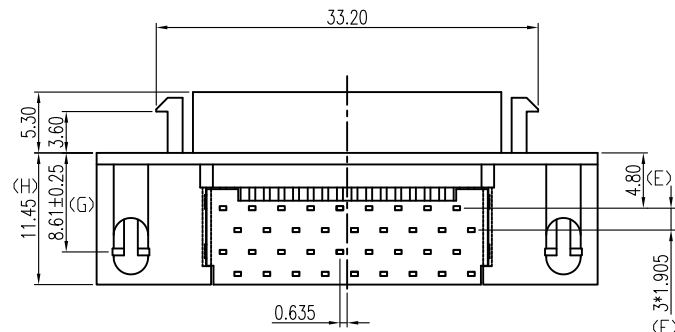
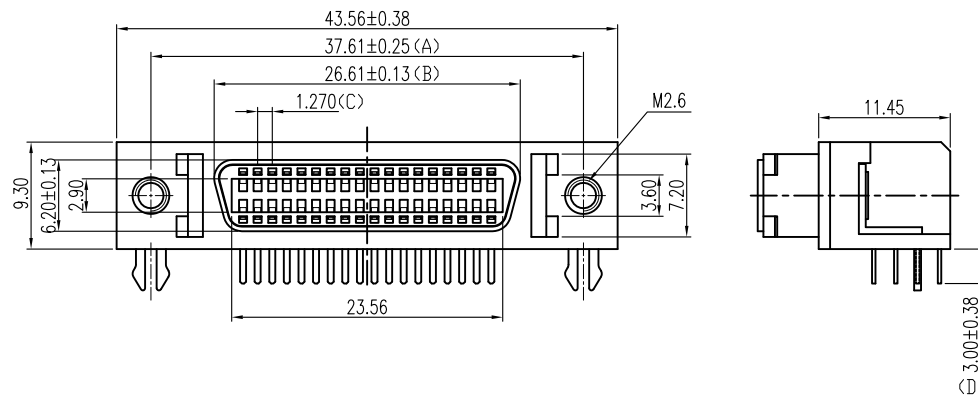


RECOMMENDED P.C.B LAYOUT
INSPECTION DIMENSION:(A)~(H)

SPECIFICATIONS

1. SCS1
- 1.1 Current Rating: 1 Ampere per Contact
- 1.2 Contact Resistance: 35 Milliohms Max.
- 1.3 Insulation Resistance: 1000 Megohms Min.
- 1.4 Dielectric Withstanding Voltage: 500V AC(RMS)
- 1.5 Total Mating Force: 12.3 Kgf Max.
- 1.6 Total Unmating Force: 1.3 Kgf Min.
- 1.7 Operating Temperature: -55°C to +85°C

NOTES

1. MATERIAL:
Housing:PBT, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:Zinc Alloy.
Boardlock:Copper Alloy.
2. FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
3. This Product is LEAD-FREE & RoHS Compliance Product.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ± 0.25
.XXX ± 0.13
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

HPC-SRLZA-036-LF
SERIES | | | | LEADFREE
| | | | 36 WAY
| | | | ZINC ALLOY
| | | | LOCK
| | | | DIP 90°
| | | | FEMALE

DESCRIPTION: