



MATERIAL :
 INSULATOR : PBT+30% GLASS FIBER (UL94V-0)
 CONTACT : PHOSPHOR BRONZE OR BRASS
 CONTACT PLATED : GOLD OR TIN OVER NICKEL

SPECIFICATION :
 CURRENT RATING : 1AMP.
 WITHSTANDING VOLTAGE : AC 500V R.M.S
 INSULATION RESISTANCE : 1000MEGOHMS MINIMUM
 AT DC 500V.
 CONTACT RESISTANCE : 15 MILLMIOHMS MAXIMUM.
 OPERATING TEMPERATURE ; -40°C~105°C.

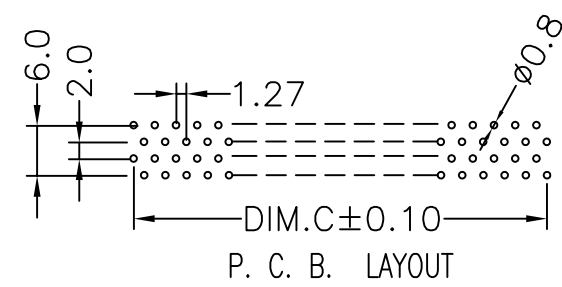

PIN	A	B	C
20	24.15	16.93	11.43
40	36.85	29.63	24.13
50	43.20	35.98	30.48
68	54.63	47.41	41.91
80	62.25	55.03	49.53

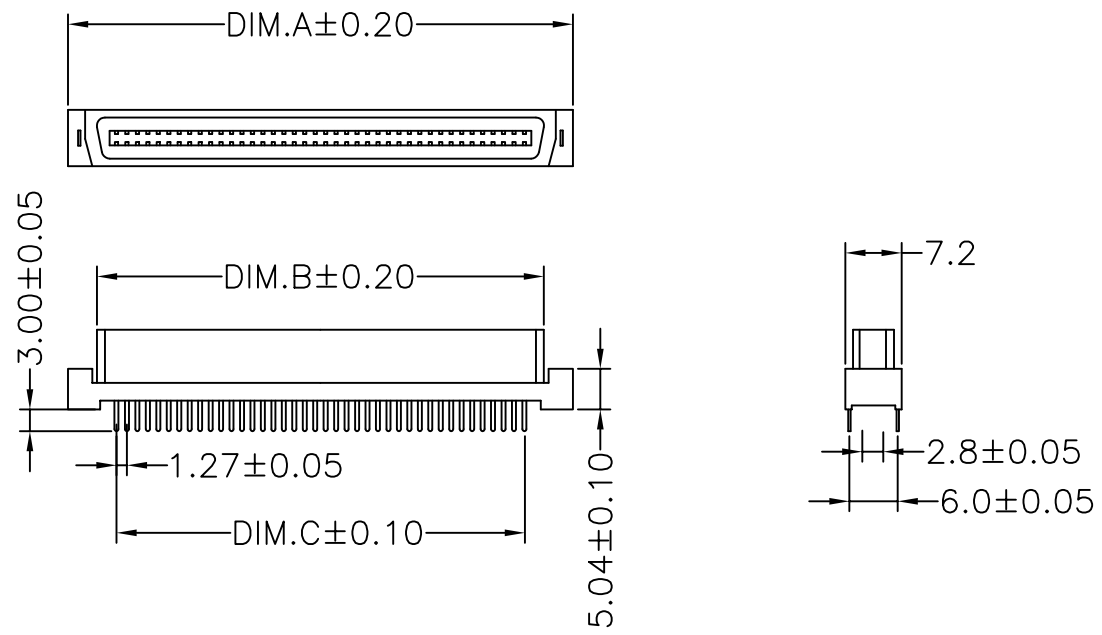

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE

TOLERANCES ARE
 X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

SIZE A4 PROJECTION

照片框

ORDER INFORMATION

HPCP-SD-xxx-LF
 SERIES LEADFREE
 020~080 WAY
 DIP 180°
 FEMALE

DESCRIPTION: