

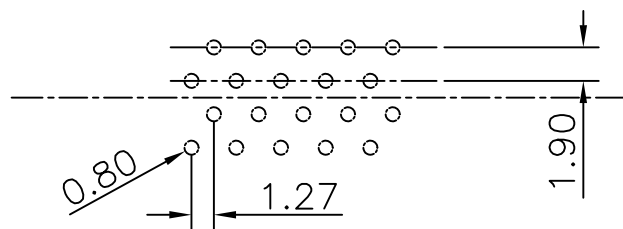

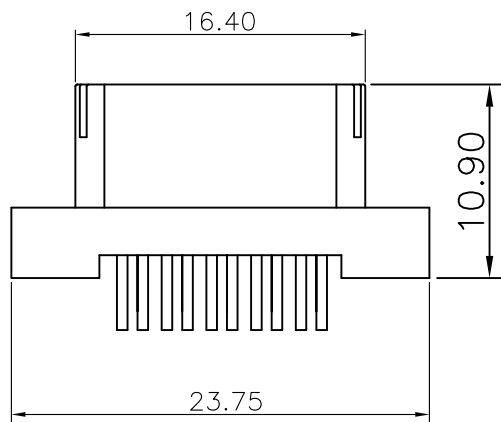


SECTION:A-A

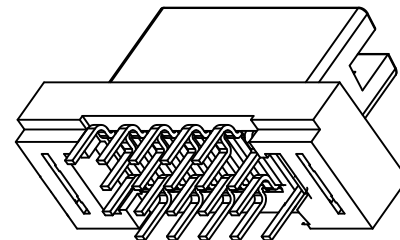

PCB LAYOUT: COMPONENT SIDE RECOMMENDED PCB THICKNESS:1.60mm

NOTE:
MATERIAL:
HOUSING:THERMOPLASTIC(NYLON+GF)UL 94V-0
CONTACT:PHOSPHOR BRONZE
PLATING:
CONTACT: GOLD PLATING
SPECIFICATION:
VOLTAGE RATING: 250V
CURRENT RATING: 1A
CONTACT RESISTANCE TERMINAL:30mΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE:500V AC/MIN
INSULATION RESISTANCE:1000MΩ MIN

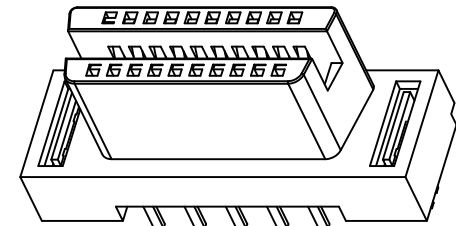

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HPCP-SDXU-20-LF

SERIES
LEADFREE
20 WAY
U TYPE
FEMALE NON CLIP
DIP 180°

DESCRIPTION: PITCH 1.27mm CARD EDGE 20PIN DIP