
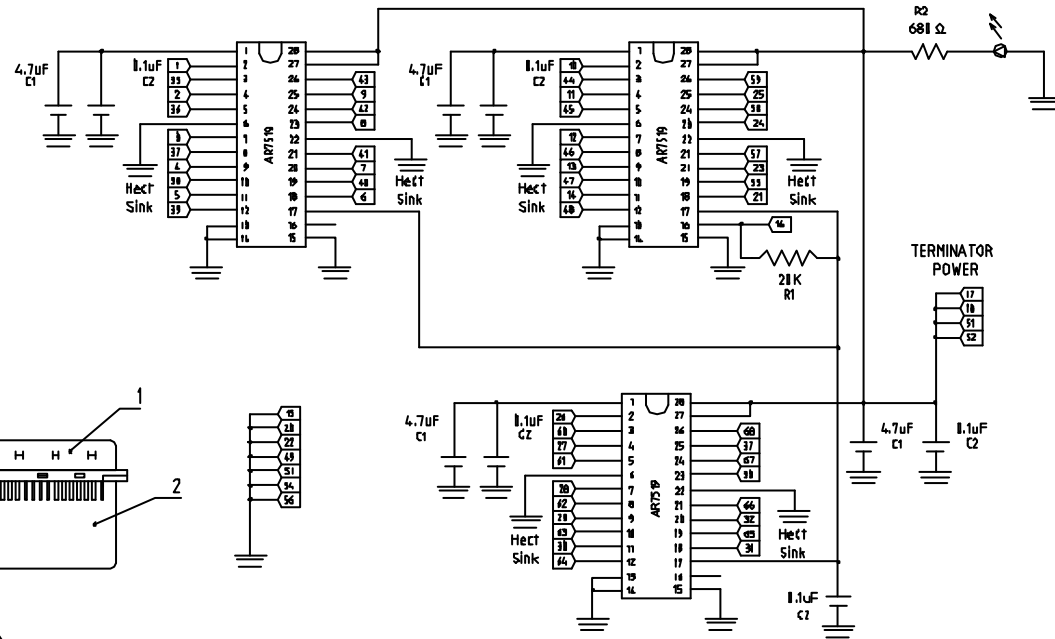
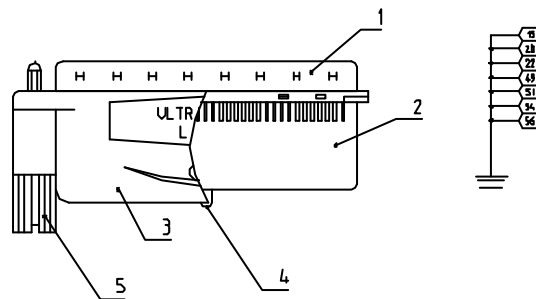
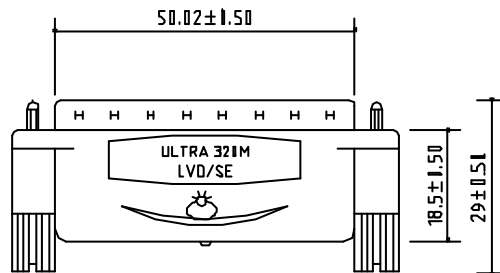


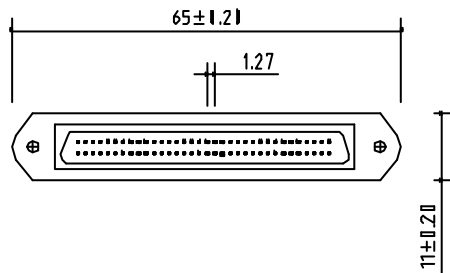

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

	COMPONENTS	DESCRIPTION	Q'TY
1	MDS68BM	Half Pitch D-SUB 1.27mm 68P Male Connector 5u"	1
2	PCB	FR/4	1
3	Hood	ABS Color:Black	1
4	LED	indicator Light Color :Green	1
5	Jack Screw	UNC #2-56	1
6	C1	4.7uF/16V/K±10%/CERAMIC	4
7	C2	1.1uF/50V/M±20%/CERAMIC	5
8	R1	20K Ω ±1%/ALUMINA/CERAMIC	1
9	R2	680 Ω ±1%/ALUMINA/CERAMIC	1
10	IC	AR7519	3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HPD-MT-068-LF
SERIES | LEADFREE
68 WAY
THUMBSCREW
METAL HOOD

DESCRIPTION: