

● MATERIALS: (RoHS Compliant)


Back Shell: Zinc Alloy Nickel Plated Over Copper
Flat Screws: Steel Nickel Plated Over Copper
Cable Clipper: Steel Nickel Plated Over Copper
Spring Latches: Stainless Steel

● MATERIALS: (RoHS Compliant)

Housing And Cover : Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts : Phosphor Bronze Gold
Selective Plated
Front Shell : Steel Nickel Plated
Over Copper


● ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 0.5 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +85°C

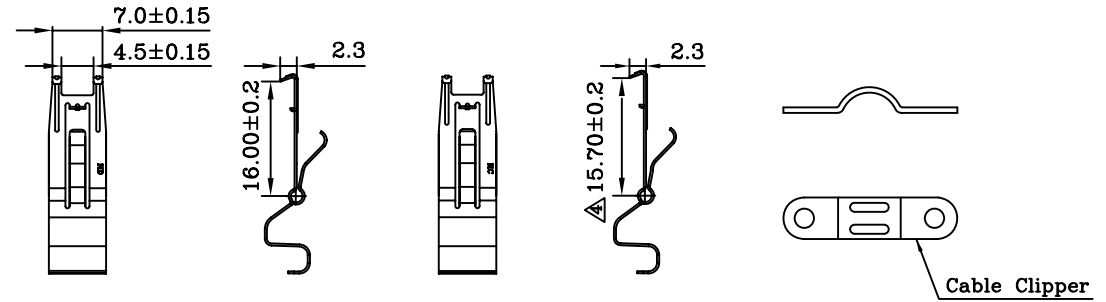

《HP · DB》

《HP · CN》

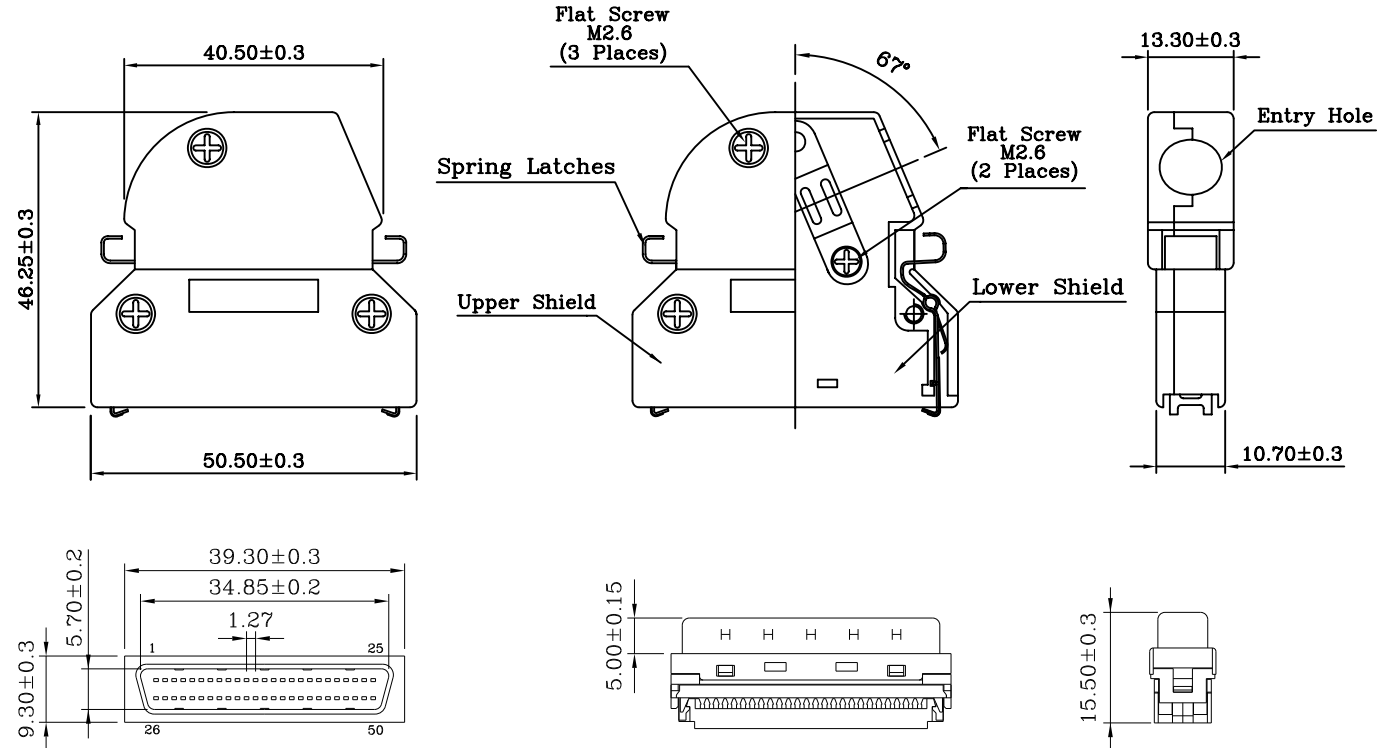

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

HPD-PFWA-050-LF

SERIES

50 WAY

LEADFREE

SLANT

W TYPE COVER

IDC

MALE

DESCRIPTION: 1.27mm(.050") Series Shielded Backshell Kits 50 Pos
Angled Exit With Spring Latches