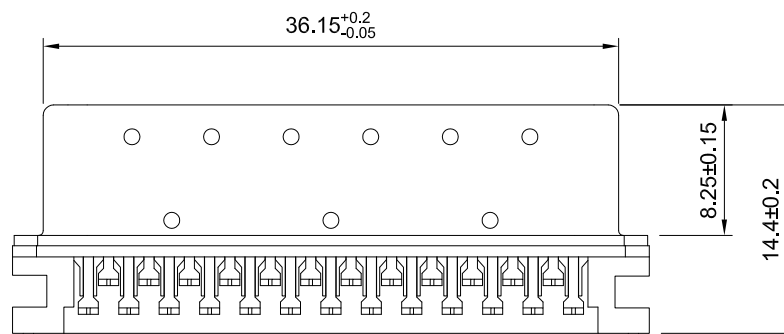
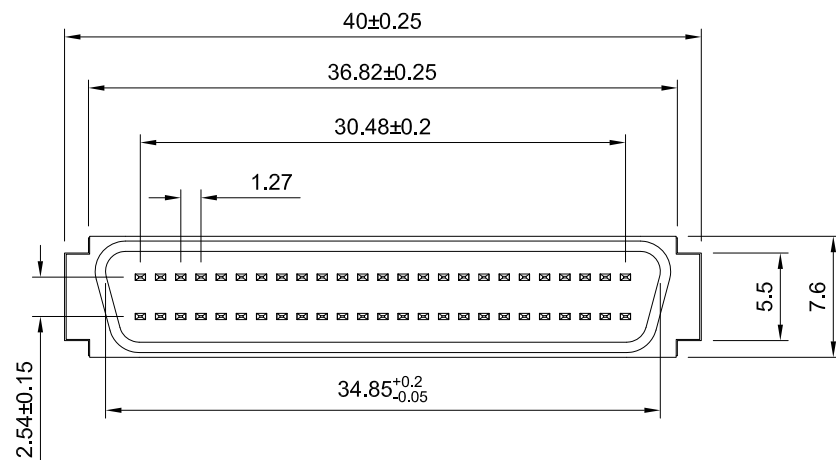


ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING: 1 AMPERE
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
CONTACT RESISTANCE: 25 MILLIOHMS MAX.

MATERIALS

CONTACTS: COPPER ALLOY
INSULATOR: THERMO PLASTIC 94V-0
SHELL: COLD ROLLER STEEL

FINISHES

CONTACT: 5 μ " MIN. GOLD ON MATING END;
ALL UNDERPLATED NICKEL


SHELL: NICKEL OVER COPPER

ENVIRONMENT

OPERATION TEMPERATURE: -55°C TO + 85°C
COMPATIBLE CABLE: AWG #28

NOTES

1. MATERIAL: THERMOPLASTIC
2. THE STRAIN RELIEF WILL NOT BE SOLD SEPARATELY

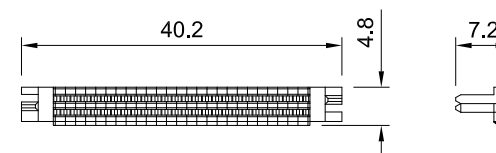

SCANLE: 1:1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION




X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.20
.XXX $\pm$ 0.15
ANG $\pm$

照片框

ORDER INFORMATION

HPD-PIM-050-LF
SERIES | LEADFREE
50 WAY
METAL HOOD
IDC
MALE

DESCRIPTION:

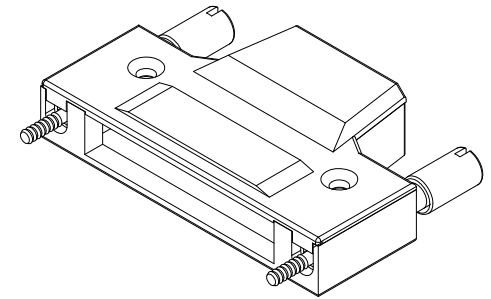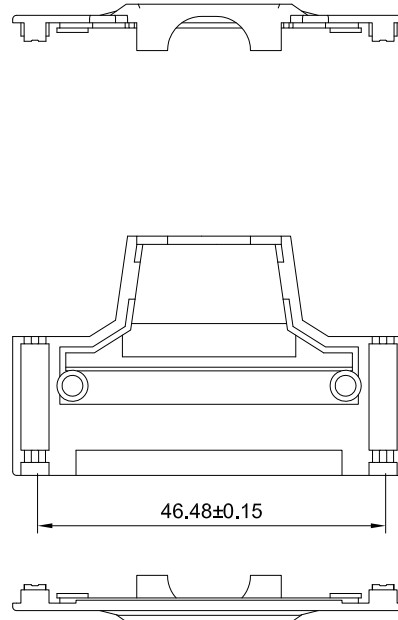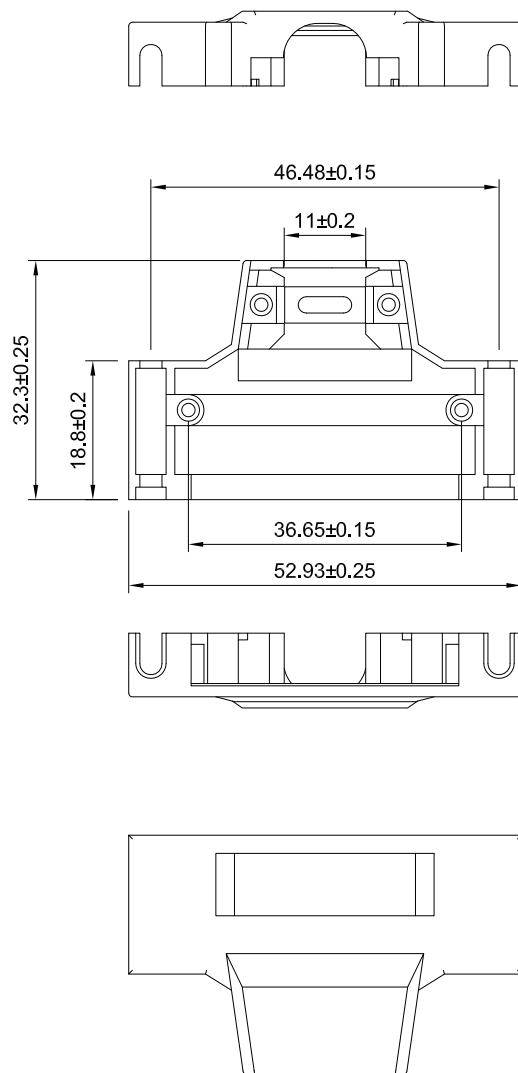


MATERIALS

BACKSHELL: ZINC ALLOY

FINISHES

BACKSHELL: ZINC ALLOY,
PLATED NICKEL OVER COPPER

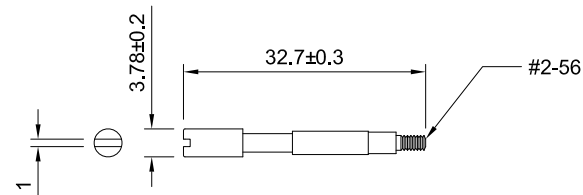

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HPD-PIM-050-LF
SERIES T LEADFREE
50 WAY
METAL HOOD
IDC
MALE

DESCRIPTION: