
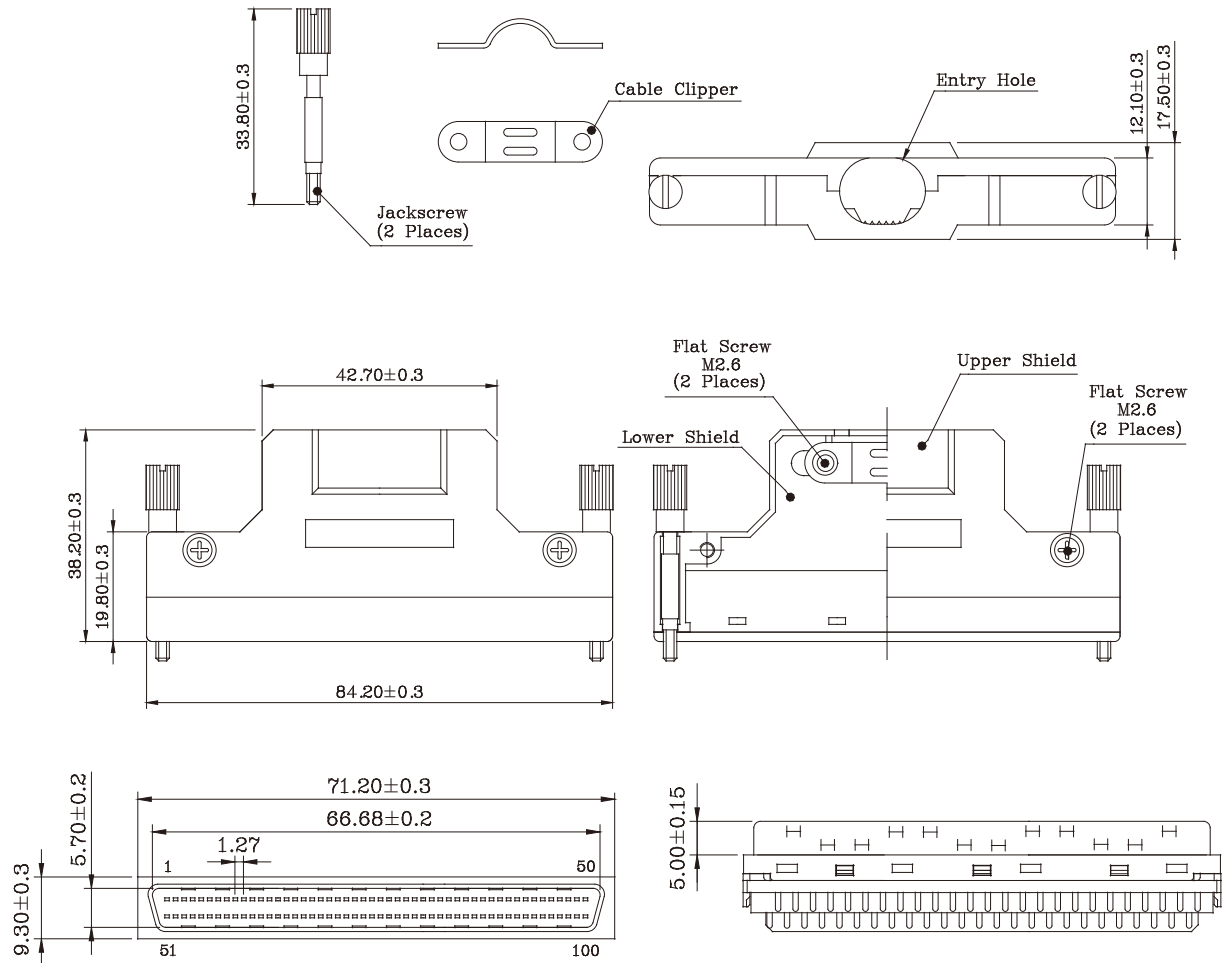


• **MATERIALS:(RoHS Compliant)**

Housing: Plastic Thermoplastic  
 P.B.T UL94V-0 Black  
 Contacts: Phosphor Bronze Gold  
 Selective Plated  
 Front Shell: Steel Nickel Plated  
 Over Copper

• **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 1 Amp  
 Dielectric Withstanding Voltage: 500V AC  
 Insulation Resistance: >500MΩ/Min  
 Contact Resistance: 35mΩ/Max  
 Operation Temperature: -55°C ~ +105°C

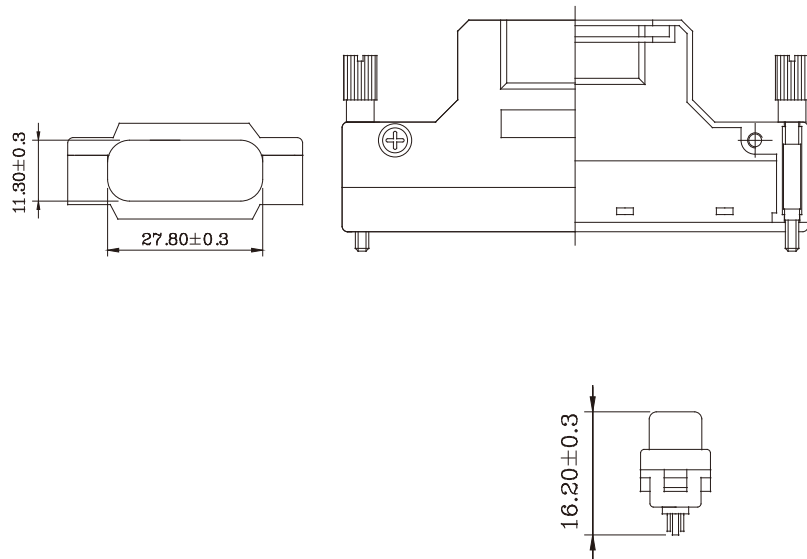

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

照片框

**ORDER INFORMATION**

HPD-PSM-100-LF  
 SERIES LEADFREE  
 100 WAY  
 METAL COVER  
 SOLDER  
 MALE

煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: 1.27mm(.050") Series Shielded Backshell Kits 100 Pos Straight Exit With Jackscrew