
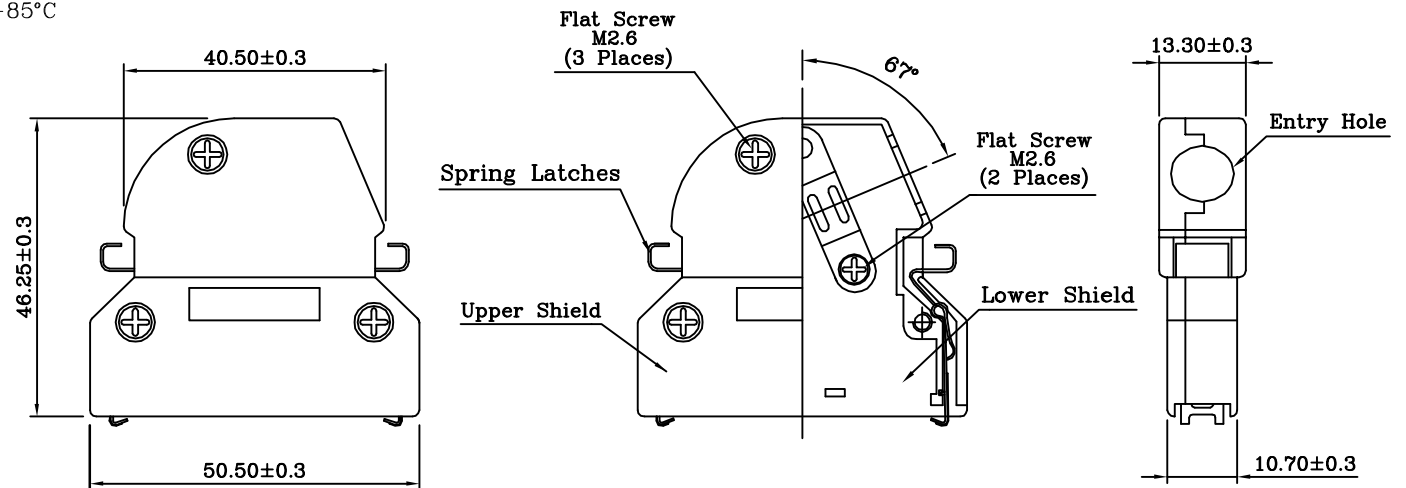
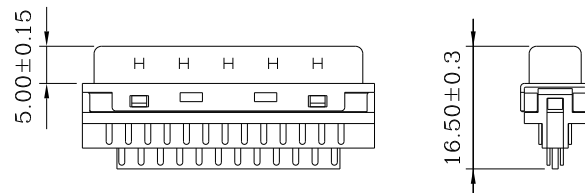
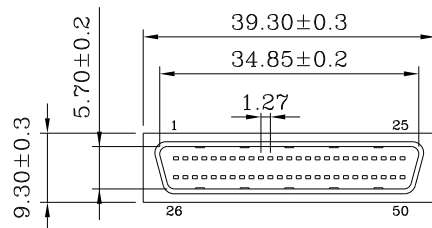


● MATERIALS: (RoHS Compliant)

Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts: Phosphor Bronze Gold
Selective Plated
Front Shell: Steel Nickel Plated
Over Copper

● ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 0.5 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +85°C

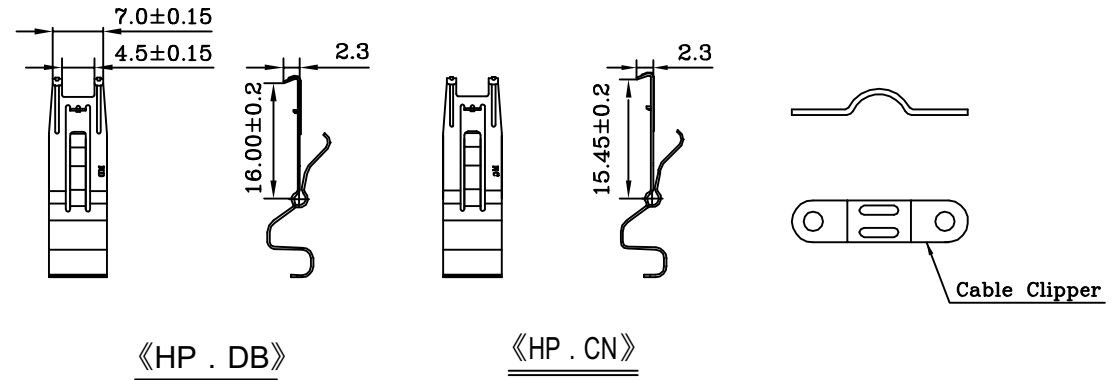

ENTRY HOLE SIZES:

9= (Ø9.0)

11= (Ø11.0)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG ±



ORDER INFORMATION

HPD-PSWADxx-050-LF
SERIES 50 WAY LEADFREE
D09:DIA Ø9.0
D11:DIA Ø11.0
MALE SLANT
SOLDER W TYPE COVER

DESCRIPTION: 1.27mm (.050") Pin Type 50Pos Cable Plug Connector Solder Assembly Type