

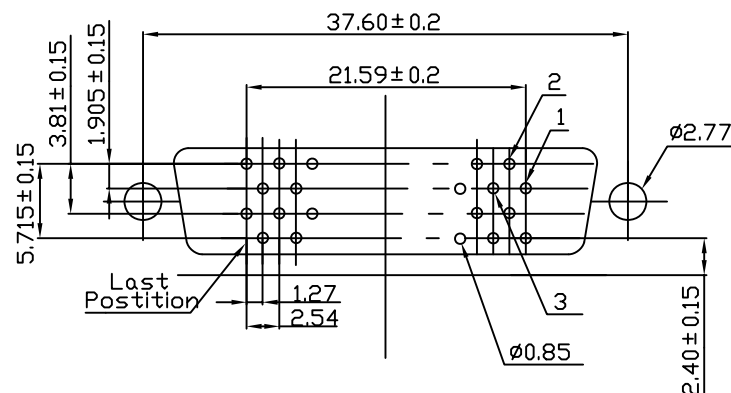



Housing : Plastic thermoplastic
Contacts : Phosphor bronze gold
selective plated
Bracket : Die-Cast Zinc nickel
plated over copper

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500M OHM/Min
Contact Resistance: 35m ohm/Max
Operation Temperature: -55 ~ +105 °C

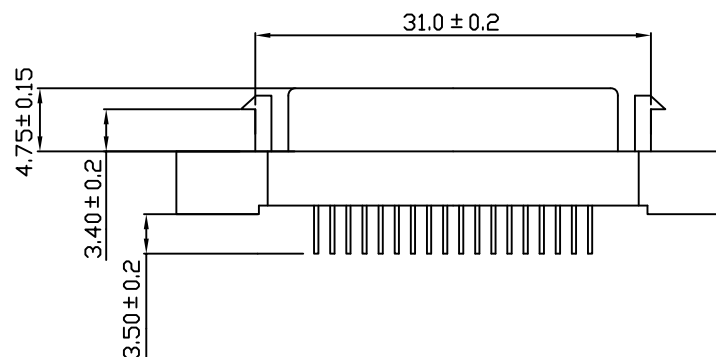

TOLERANCES ARE

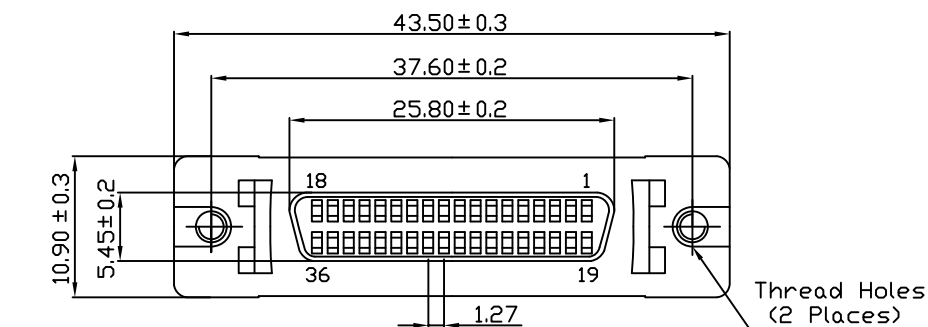

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE _____

SIZE A4

PJECTION 

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

HPD-SDL-036-LF

SERIES

LEADFREE

36 WAY

LOCK

LOCK
DIP 180°

FEMALE

DESCRIPTION:1.27mm Pin Type 36Pos Receptacles Headers Vertical Mount Type