

• **MATERIALS:(RoHS Compliant)**

Housing: Plastic Thermoplastic
P.B.T UL94V-0 Black

Contacts: Phosphor Bronze Gold
Selective Plated

Front Shell: Steel Nickel Plated
Over Copper

Latch Blocks: Steel Nickel Plated
Over Copper

Screw NUT: Copper Alloy

• **ELECTRICAL CHARACTERISTICS:**


Contact Current Rating: 0.5 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: >500M Ω /Min

Contact Resistance: 35m Ω /Max

Operation Temperature: -55°C ~ +85°C

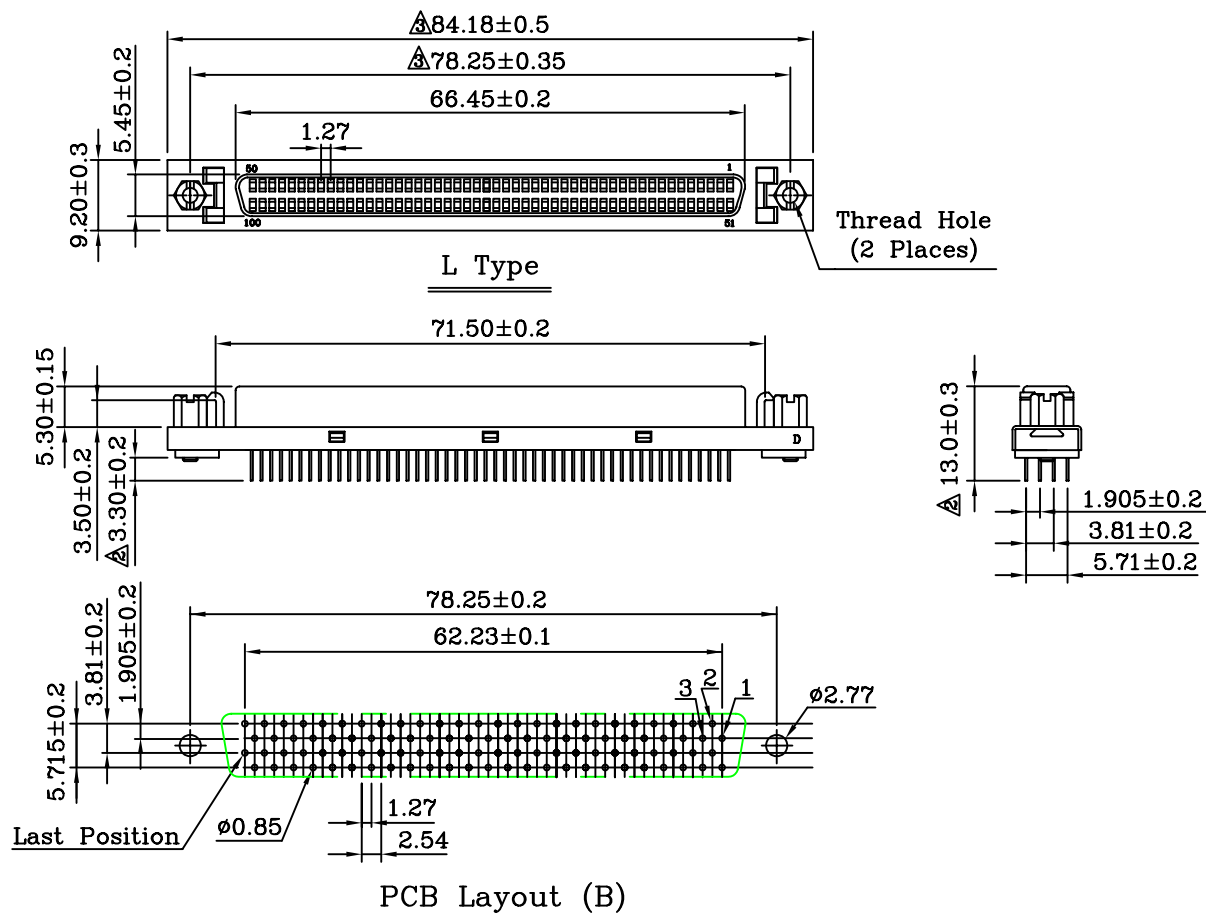

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$ 1°



ORDER INFORMATION

HPD-SDLJ-100-LF
SERIES | LEADFREE
100 WAY
JACKSCRW
LOCK
DIP 180°
FEMALE

DESCRIPTION: 1.27mm (.050") Pin Type 100Pos
Receptacles Headers Vertical Mount Type