
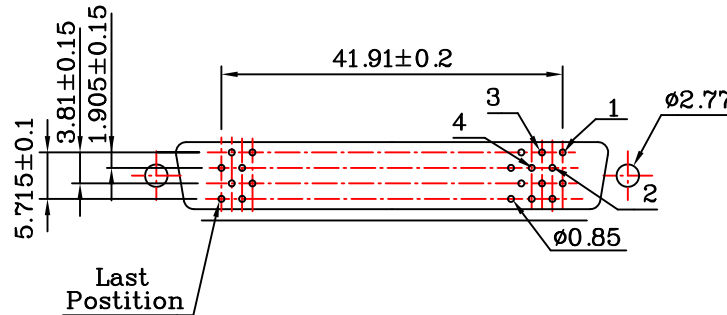

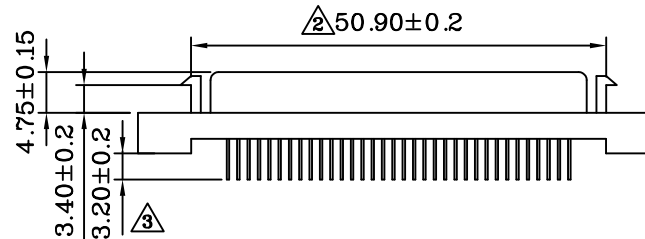
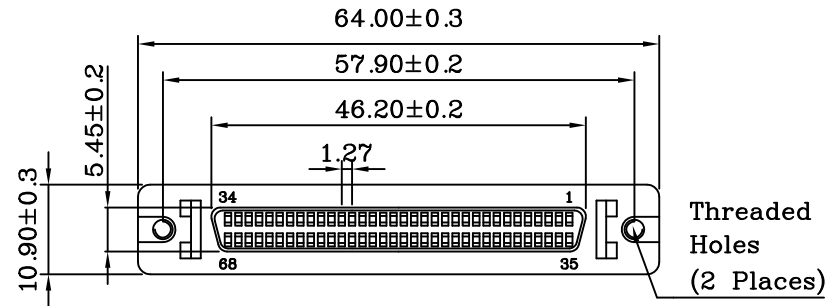


• **MATERIALS:(RoHS Compliant)**


Housing : Plastic thermoplastic  
P.B.T UL94V-0 black  
Contacts : Phosphor bronze gold  
selective plated  
Bracket : Die-Cast Zinc nickel  
plated over copper

• **ELECTRICAL CHARACTERISTICS**

Contact Current Rating: 1 Amp  
Dielectric Withstanding Voltage: 500V AC  
Insulation Resistance: 500M $\Omega$ /Min  
Contact Resistance: 35m $\Omega$ /Max  
Operation Temperature: -55°C~+105°C

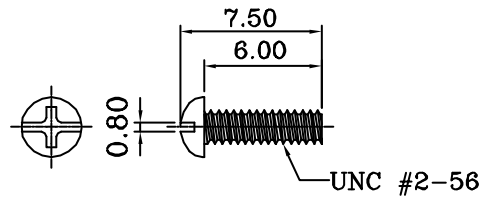

L1:Reveres  
PCB LAYOUT

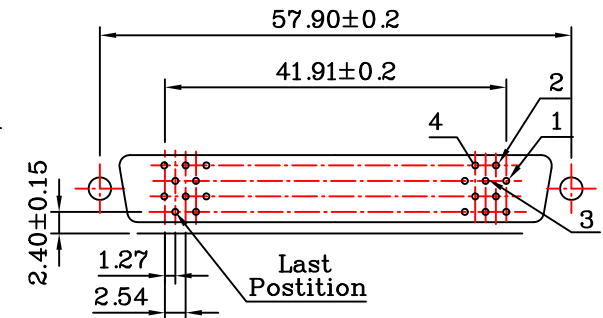

L2:Standard  
PCB LAYOUT

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±

.X±

.XX±

.XXX±

ANG ±

照片框

**ORDER INFORMATION**

HPD-SDLLxM-068-LF  
SERIES LEADFREE  
68 WAY  
FEMALE L1:L1 Reveres  
DIP 180° L2:L2 Standard  
LOCK

DESCRIPTION: 1.27mm (.050") Pin Type 68Pos  
Receptacles Headers Vertical Mount Type