
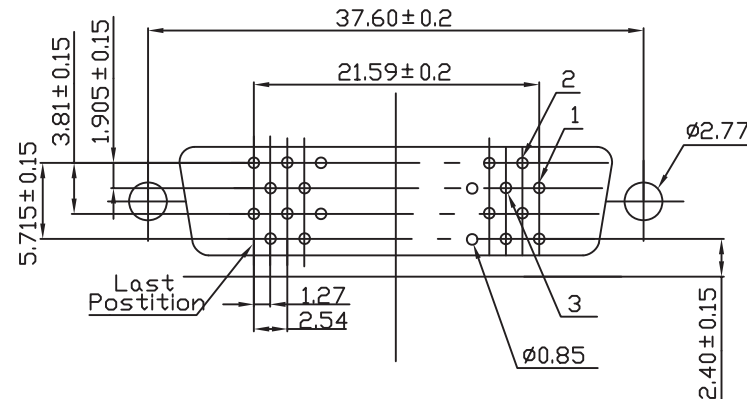

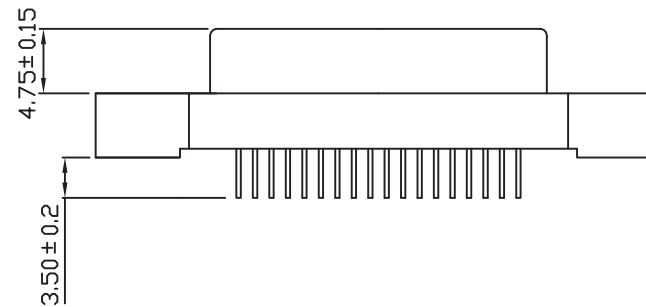


MATERIALS:(RoHS Compliant)

Housing : Plastic thermoplastic
 Contacts : Phosphor bronze gold selective plated
 Bracket : Die-Cast Zinc nickel plated over copper

ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp
 Dielectric Withstanding Voltage:500V AC
 Insulation Resistance:500M OHM/Min
 Contacts Resistance: 35m ohm/Max
 Operation Temperature:-55°C ~ +105 °C

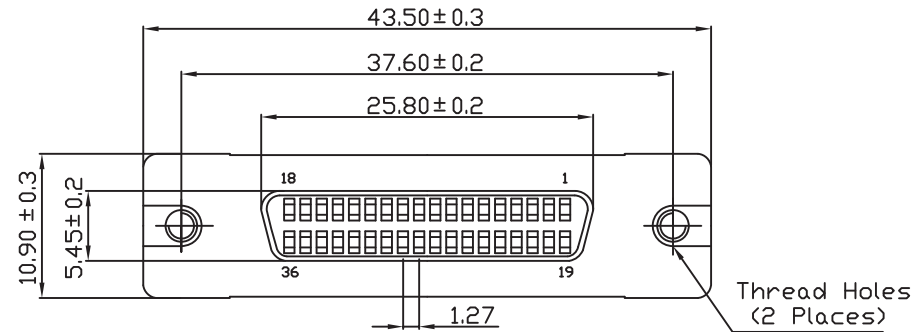

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

HPD-SDX-036-LF

SERIES

LEADFREE

36 WAY

NON LOCK

DIP 180°

FEMALE

DESCRIPTION: 1.27mm Pin Type 36Pos Receptacles Headers Vertical Mount Type