

FEATURES:



- Half pitch 1.27mm(.050") series
- D-SUB type female connector for P.C.B straight Dip solder type
- receptacle assemblies
- bracket with latch block and without latch block
- Die-Cast body provide EMI/RFI shielded

MATERIALS:


- Housing: Plastic thermoplastic P.B.T UL94V-0 black
- Contact: Phosphor bronze gold selective plated over Tin
- Bracketshell: Die-Cast Zinc Nickel plated over copper

ELECTRICAL:

- Current Rating: 1 Amp
- Insulation Resistance: 500M Ω /Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35m Ω Max
- Temperature Range: -55°C ~ +105°C

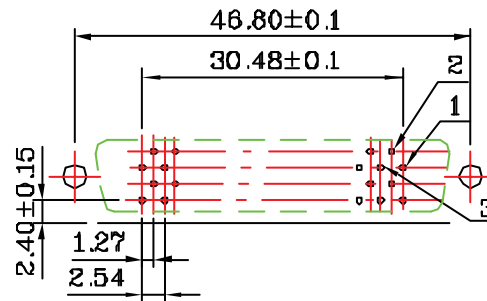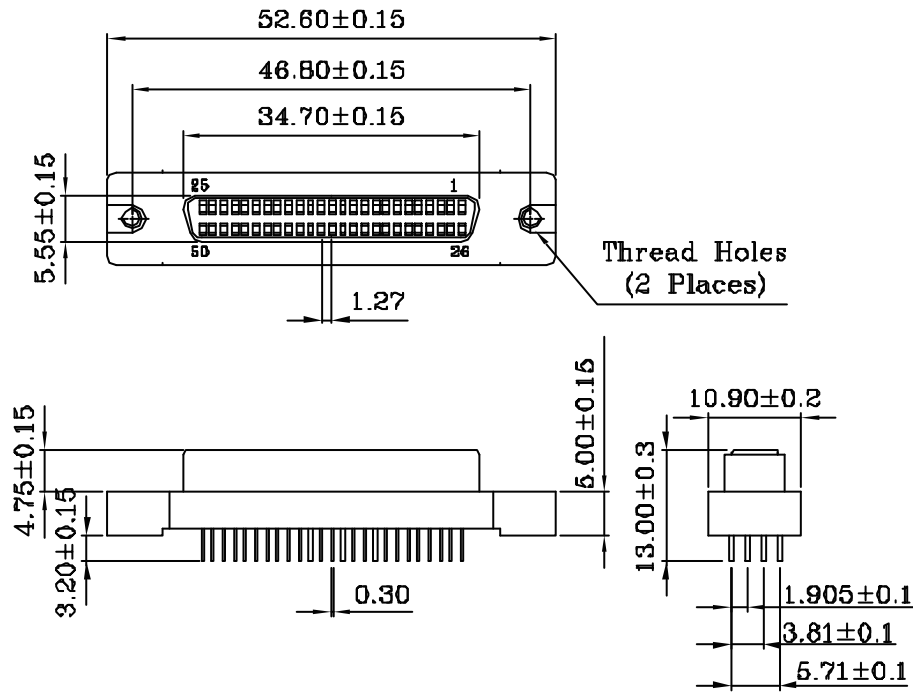

2N
P.C.Board Hole Pattern

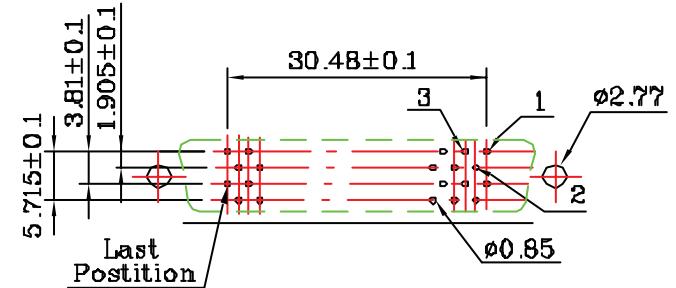

1N: Standard
P.C.Board Hole Pattern

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
X. $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

HPD-SDX-050-LF
SERIES
LEADFREE
50 WAY
NON LOCK
DIP 180°
FEMALE

DESCRIPTION: 1.27mm(.050") Pitch D-SUB 50P Female Connector Straight Dip Solder Type