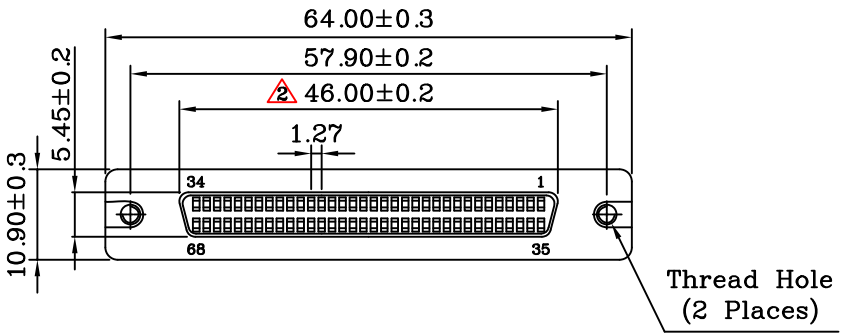

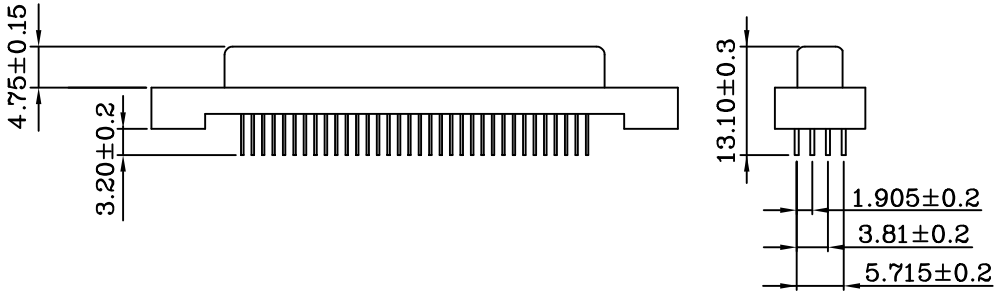

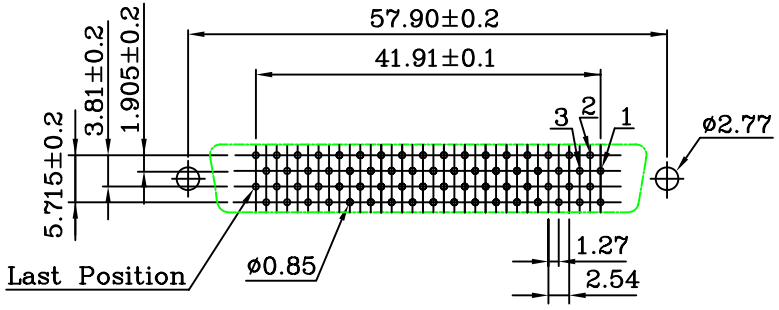

PCB Layout (B)

- **MATERIALS: (RoHS Compliant)**

Housing:	Plastic Thermoplastic P.B.T UL94V-0 Black
Contacts:	Phosphor Bronze Gold Selective Plated
Front Shell:	Steel Nickel Plated Over Copper

- **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating:	0.5 Amp
Dielectric Withstanding Voltage:	500V AC
Insulation Resistance:	>500MΩ/Min
Contact Resistance:	35mΩ/Max
Operation Temperature:	−55°C ~ +85°C

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
		.XXX ±
DATE		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

HPD-SDX-068-LF

SERIES — FEMALE — DIP 180° — NON LOCK — 68 WAY — LEADFREE

DESCRIPTION: 1.27mm(.050") Pitch D-SUB 68P Female Connector Straight Dip Solder Type